



□ □ □ □ □ □ □ □ □ □ □ □ □ □

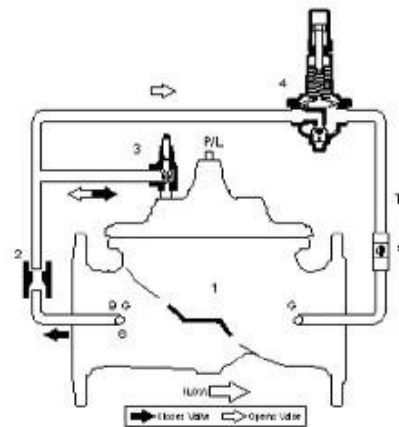

WRAS/KTW/NSF/FDA/ACS

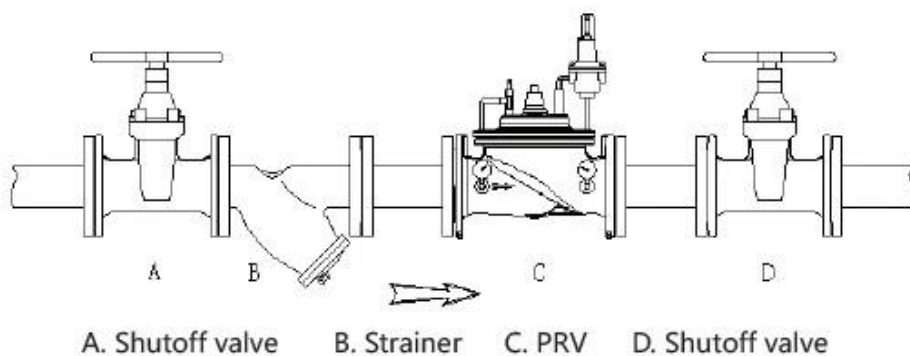

.....

000000 0000

000000 000 000 00000000 000000 000 00 0000 00 00000 - 0000000 000 0000000 0000 0000 00 000000 00 00000 0000

000000 000 0000000 00 000000 000 000000 0000 000000 00.

口径	DN40-DN1200
密封形式	密封
使用温度 范围	0 °C ~ 70 °C
材料	密封材料 橡胶/聚四氟乙烯密封材料 密封材料 聚四氟乙烯密封材料/密封材料/密封材料/密封材料

DN	□	□	H1	DN	□	□	H1
40	230	139	85	250	730	476	205
50	230	139	85	300	850	526	232
65	290	159	95	350	980	585	262
80	310	179	102	400	1100	624	292
100	350	214	112	500	1250	720	360
125	400	278	127	600	1450	835	424
150	480	333	145	800	1850	1110	515
200	600	407	172	1000	2250	1350	630



COMPANY INFORMATION



- i. 本公司 擁有 先進 的 生產 設備 及 技術 人員 ； 能 生產 出 高 質 量 的 產品 。
- ii. 本公司 擁有 CNC 加工 及 鑄造 設備 ； 能 生產 出 高 質 量 的 產品 ； 且 能 生產 出 高 質 量 的 產品 。
- iii. 本公司 能 生產 出 高 質 量 的 產品 ； 且 能 生產 出 高 質 量 的 產品 。

iv. **High Quality:** The valves are made of high quality materials and are designed to meet the highest standards of performance and reliability.

v. **Compliance:** The valves comply with various international standards and certifications, including GB, German Standard, American Standard, Tuv CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, and API609.

The valves are available in various sizes and configurations to meet the specific requirements of different applications. The company also offers a range of services, including design, manufacturing, and installation, to ensure that the valves are perfectly suited to the customer's needs.

COMPANY FACTORY



01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06


COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners

00000000 0000 0000000000 00 000 0 0000000 0000 000000 0000 0000 :0

□□□□□ □□□□ □ □□□□□□□□ □□□□□ □□□□□ □□ :□

□□□□□□□□ □□□□ □□ □□ :□

□□□□ : RKSfluid . □□□□□□ □□□□ □□□□□□ □□□□ □□ □□□□ □□□□ □□□□ □□

.000000 000 000000 000000.000 00000 5 ~ 2 00 000000 000 00000000 000000000 :0

1 : pc . 00000000 00000000

.000000 00 000000 000000 00 0000.000000 00000 0 00000000 0000 0 100 00000 0000000 :0

□□□□ □□ □□□□ TUV □ API □ WRAS □ CE □ ISO.

□□ □□□□□□ □□□□□□ DIN □ ASME □ BS EN □ JIS □ API □ AWWA.

□□□□□□□□ □□□□□□ □□□□□□ □□□□ □□□□□□ □□□□□□ □□□□ □□□□ :□

A: RKSfluid 1000000 100000 100000 1000000 100000 1000000 70 10 100000 100000 20 100000 1000000
10 1000000 1000000 1000000.