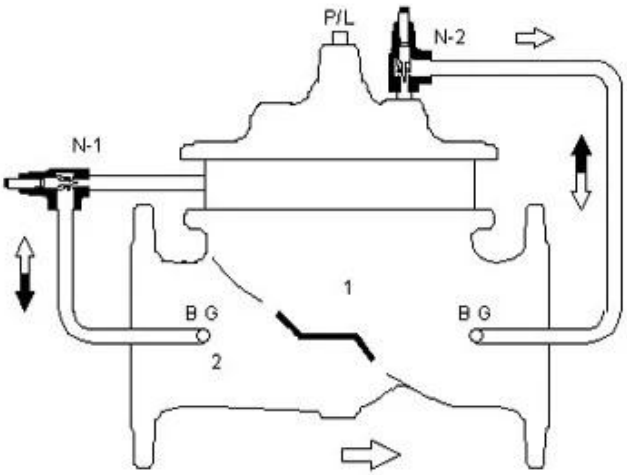

□□□□:

Fully bore globe pattern design, lowest head loss while fully open
Keep stable working condition even the flow rate close to zero
High sensitive and strength fabric reinforced diaphragm
- 1000000 cycles test between fully close and open with working pressure
- 5 times of working pressure destructive test
Most components are machined by CNC
Fusion bonded epoxy coating process is based on GSK & WIS standard
High standard production test
- Seal test: Low pressure 0.5 bar
High pressure 1.1xPN+1 bar
- Shell test: 1.5xPN+1 bar
- Pressure modulated vibration: +/-0.2 bar
Data collected automatically 1000 times/sec, display with static or dynamic chart
Easy installation, operation and free maintenance
Different materials with WRAS/KTW/NSF/FDA/ACS certification to meet different market

Size	DN40-DN1200
Working Medium	Water
Temperature	0°C~70°C
Material	Ductile Iron/Stainless Steel/Cast Steel/Bronze/Aluminum Alloy
Design Standards	CJ/T 219 & JB/T 10674 & EN 1074-5
Pressure Level	PN10, PN16, PN25
Stress Test Standard	GB/T 13927 & ISO 5208 &EN12266-1
Flange drilling standard	GB17241.6; EN1092-2; ISO7005-2; ANSI / JIS / AS2129
Structure Length	GB 12221 & EN558-1

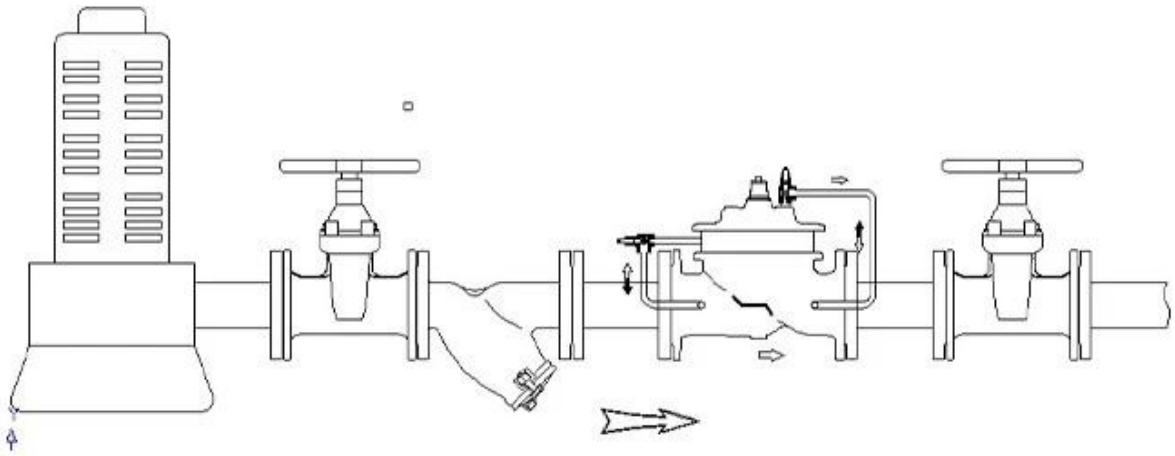

The 745X dual-chamber multi-function pump control valve is installed at the pump outlet to prevent and eliminate the damage of water hammer to the pipeline system/pump when the pump is turned on/off
When the pump opened, the inlet pressure gradually into the valve cavity, so that the valve slowly open, open speed can be adjusted by the needle valve;
When the pump suddenly power failure or stop pumping, lift-off valve disc in its own gravity, Spring Force after the return of the back end of the water hammer force quickly closed.Prevent the back-end of the high-pressure water hammer on the front of the pump damage. Valve closing speed can be adjusted by needle valve or ball valve.

i مجال الأعمال: منتجات التحكم في السوائل والتكنولوجيا ومنتجات حماية البيئة.

ii مراكز تصنيع CNC المتقدمة ، وخلايا العمليات المهنية ، ومعدات اللحام الواسعة المدى ، وخطوط التجميع التلقائية والطلاء.

iii الوحدة المرجعية القياسية في الصين ، للمشاركة في تطوير معايير صناعة الصمامات ذات الصلة.

iv أنشأنا مركزًا للبحث والتطوير في هيوستن ، تكساس ، في الولايات المتحدة.

v معيار المنتج: GB ، German Standard ، American Standard ، Tuv CE ، ISO 9001 ، ADWO-2000 ، TS ، PED ، WRC WRAS ، KTW ، API 6D ، API609.

السادس الإنتاج الرئيسي: صمام فراشة, ball valve, gate valve, check valve, globe valves, pipe fittings, manual / pneumatic / electric actuator, valve parts

Exhibition Photos

التعليمات

س: إذا كنت بحاجة إلى اقتباس ، فما هي المعلومات التي نحتاجها؟
A: ، نظام التطبيقات.مواد الصمامات ، درجة الحرارة ، الضغط ، المتوسط

س: هل يمكنك توفير المحركات ، ماذا لديك؟
A: المحركات تتبنى تكنولوجيا الولايات المتحدة الأمريكية. RKSfluid. الهوائية ، الكهربائية ، صمامات الملف اللولبي الذي تحتاجه ، فقط أخبرنا.

س: ما هي قدرتك الإنتاجية؟
ج: يحتوي RKSfluid على أربعة مصانع يمكن أن توفر المنتجات التي تحتاجها.

س: مهلة الإنتاج
ج: المنتجات العادية لها مخزون في 2 ~ 5 أيام عمل. قاعدة مخصصة على حاجتك.

س: موك
ج: 1 pc. لجميع المنتجات.

س: ماذا عن ضمان الجودة؟
A: 100% quality test before delivery, 2 years warranty. تأكد من سلامة العمل في النظام.
حصلنا على شهادة TUV ، API ، WRAS ، CE ، ISO.

يتوافق المعيار مع DIN ، ASME ، BS EN ، JIS ، API ، AWWA.

س: كيف يمكنك تقديم خدمة عالية الجودة لعملائنا؟

A: RKSfluid الخاصة تجارب 20 عامًا وأكثر من 70 مهندسًا للبحث والتطوير يوفرون الدعم الفني واختيار النماذج وتوجيهات التثبيت لك.