





- Streamlined, minimum noise
- Backflow velocity only 0.2s, Head loss 0.1bar with 2m/s
- EPDM/NBR Rubber fully coated disc
- Anti-erosion design. Self-adjusting ball
- Self-cleaning stem, Long time smooth operation

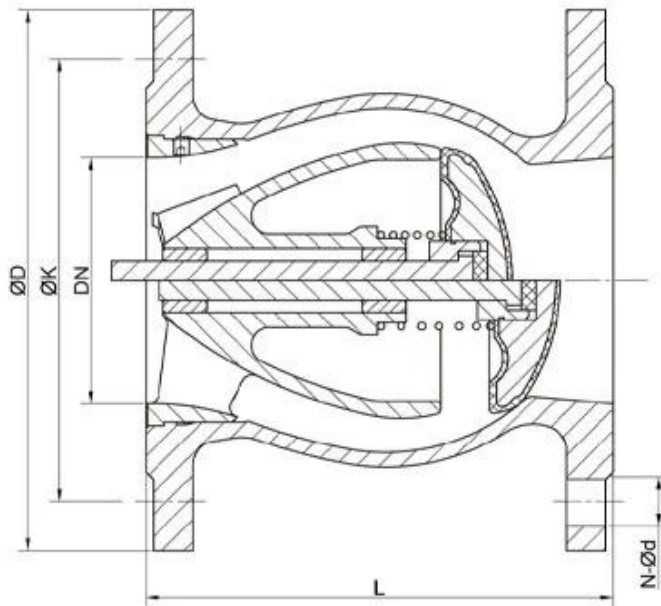

NPS2-NPS14 (DN50-DN350)

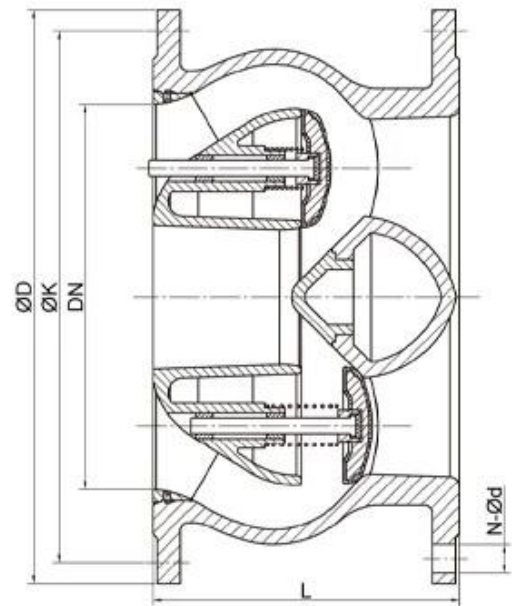

NPS16-NPS24 (DN400-DN600)



APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY





- i 000000 00000 0000000 000000000000 000000 00 000000 000000 :0000000 0000.
- ii 00000 00000 CNC 0 00000 0000000 000000 000000 0 0000000 000000000 0000000 0 000000000 00000000 000000000 0000000 000000.
- iii 000 000000000 000000 0000000 000000 00 000000000 0 000000 00 000000000 000000000 0000000 000000.
- iv 00000000 0000000000 00 0 000000 0 0000000 00 000000000 000000 0000000 0000000.
- v 0000000 000000: GB 0 German Standard 0 American Standard 0 Tuv CE 0 ISO 9001 0 ADWO-2000 0 TS 0 PED 0 WRC WRAS 0 KTW 0 API 6D 0 API609.

0000000 0 000 0000 0 00000000 0000 0 000000 0000 0 00000000 0000 :00000000 00000000 0000000
 0000000 000000 0 00000000 / 000000 / 0000 0000 0 0000000000 00000000 0 00000000 000000.

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



□□□□□□□□

□□□□□□□□ □□□□ □□□□□□□□ □□ □□□ □ □□□□□□ □□□ □□□□□ □□□ □□□ :

A: .□□□□□□□□□ □□□□ □ □□□□□□□ □ □□□□□ □ □□□□□□□ □□□□ □ □□□□□□□□ □□□□

□□□□□ □□□□ □ □□□□□□□□ □□□□□ □□□□ □□ :

A: □□□□□□□□ □□□□□ □ □□□□□□□□□ □ □□□□□□□□.RKSfluid □□□□□□□□□ □□□□□ □□□□□□□□□
.□□□□□□□ □□□ □ □□□□□□ □□□□□.□□□□□□□□□□ □□□□□□□□ □□□□□□□□

□□□□□□□□□□ □□□□□ □□ □□ □□ :

□□□□ : □ RKSfluid .□□□□□□ □□□□ □□□□□□□□ □□□□ □□ □□□□ □□□□□ □□□□ □□□□

□□□□□□□ □□□□ : □

.□□□□□ □□□ □□□□□ □□□□□.□□□□ □□□□ 5 ~ 2 □□ □□□□□ □□□ □□□□□□□□ □□□□□□□□ : □

□□□□ : □

1 : □pc .□□□□□□□□□ □□□□□□

□□□□□□□□ □□□□ □□ □□□□ : □

.□□□□□□□ □□ □□□□□ □□□□□ □□ □□□□.□□□□□□ □□□□□ □□□□□ □□□ □ 100 □□□□□ □□□□□□□□ : □

□□□□□□ □□□ □□□□□ TUV □ API □ WRAS □ CE □ ISO.

□□ □□□□□□□□ □□□□□□□□ DIN □ ASME □ BS EN □ JIS □ API □ AWWA.

□□□□□□□□□□ □□□□□□ □□□□□ □□□□ □□□□□ □□□□□ □□□□ □□□□ : □

A: RKSfluid □□□□□ □□□□□□□ □□□□□□□□□ □□□□□ □□□□□□□□ 70 □□ □□□□□□ □□□□□□ 20 □□□□□□ □□□□□□□□

□□ □□□□□□□□ □□□□□□□□ □□□□□□□□ □□□□□□□□ □□□□□□.