

.00000 00000 0000 0%100 00000 00000 0000000 00000 000000

00000 0000: DN20 DN25 DN32 DN40 DN50

00 0000 :00000000 000 DN20-32 DI 00 DN40-50

• 0000000 000000 BSPP BSPT NPT

• %100 00000 00000 000000

.00000000 00000 00000 %100 00000 •

.00000000 00000 000000 •


.000000 00 000000 •

00 00000000 000000000 00000000 00 000000 00000000 • WRAS 000000 000 000000 000000.

• 000000000 000000 000000000000000 000000000000 EN-12266-1 0 000000

0 000000 •EN1074-2

• 00000 BSP 0000 EN10226/1 00 EN ISO 228-1 G 00000 NPT 000000 0000

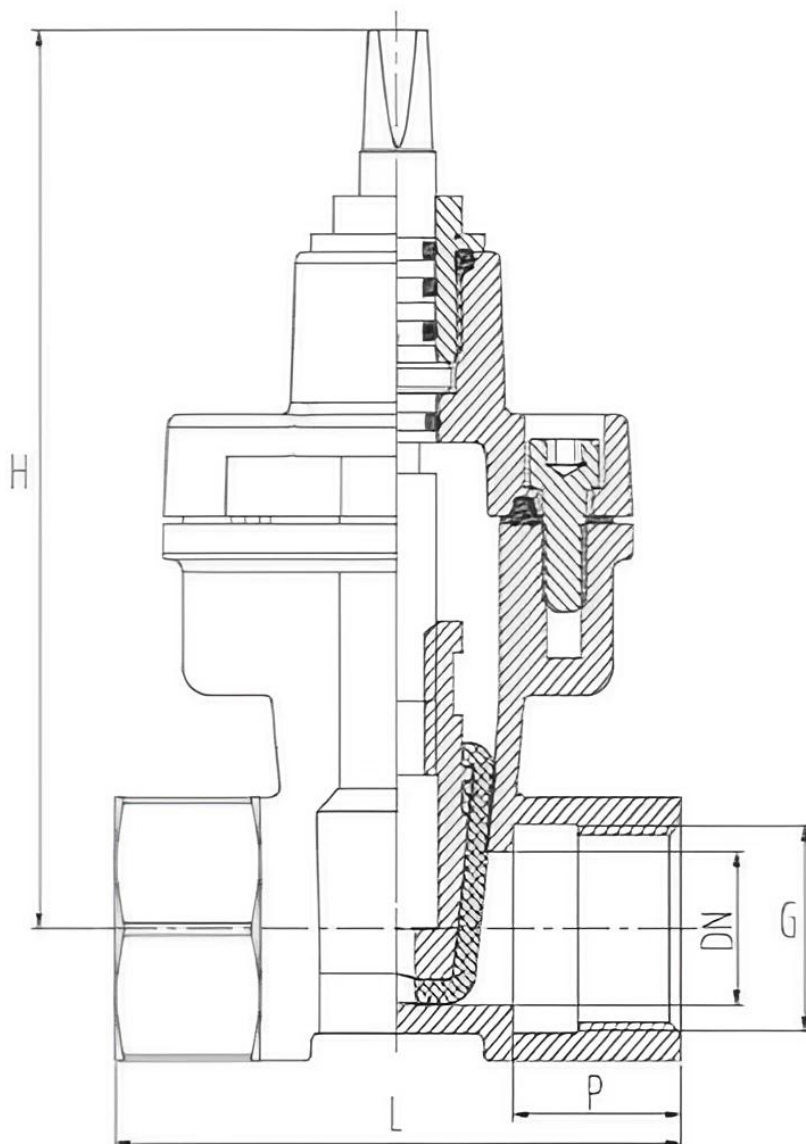

口径	G 口径 (英寸 BSP	L (毫米) 口径 (英寸	口径	口径 D	口径 口径) 口径 口径
DN20	3/4"	95	145	27	15 口径 口径
DN25	1"	105	145	30	15 口径 口径
DN32	1 1/4"	120	150	32	15 口径 口径
DN40	1 1/2"	130	202	37	30 口径 口径
DN50	2"	150	197	45	30 口径 口径



APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



[illegible]

II 000000 000000 CNC 000000 000000 000000 000000 000000 000000 0000000000 00000000 00000000 00000000
00000000000.

III _____.

IV _____

V 認證標準: GB 認證標準 認證標準 認證標準 TUV CE ISO 9001 ADWO-2000 TS PED WRC WRAS KTW API 6D API609.

[illegible]

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Delivery



Payment



0000000 000 0

00000000 0000 0000000000 00 00 0000000 0000 0000 00000 0000 0000 :
 .00000000 0000 0000000 0000000 00000000 0000 0000000000 00000 :
 000000 00 0000000000 000000 000000 00 :
 0000000 0000000 0000000000000 0000000000 00000000 0000000 :. RKSfluid 0000000000 000000 0000000000
 .0000000 000 00000000 00 .0000000000 00000000 0000000000
 00000000000 000000 00 00 :
 0: RKSfluid .00000000 00000 0000000000 000000 0000000 000000 000000 000000
 00000000 00000 :
 .000000 000 000000 000000 .000 00000 5 ~ 2 00 000000 000000 000000000 000000000 :
 0000 :
 .0000000000 000000 00000 1 :
 00000000 00000 00 00000 :
 .00 000000 00000000 000 000000 00000 .000000 00000 00000 0000000000 0000 %100 000000 00000000 0000000 :
 000000 000 000000 0000 TUV API WRAS CE ISO.
 00 00000000 00000000 DIN ASME BS EN JIS API AWWA.

සමස්තයක් ලෙස ප්‍රධාන වශයෙන් ප්‍රධාන වශයෙන් ප්‍රධාන වශයෙන් :

ආ: RKSfluid සමස්ත ප්‍රධාන වශයෙන් ප්‍රධාන වශයෙන් ප්‍රධාන වශයෙන් 70 ට වැඩි ප්‍රධාන වශයෙන් ප්‍රධාන වශයෙන් 27 ප්‍රධාන වශයෙන් ප්‍රධාන වශයෙන් ප්‍රධාන වශයෙන්.