

DESIGN FEATURES

DURABLE




- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%

ANTI-CORROSION

- Material: Epoxy powder:  , Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment

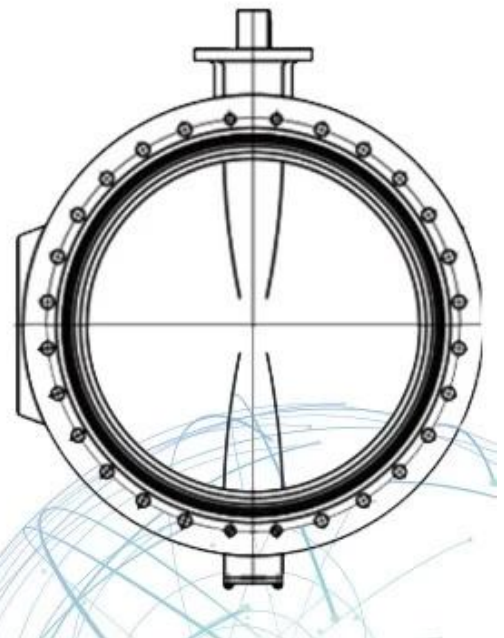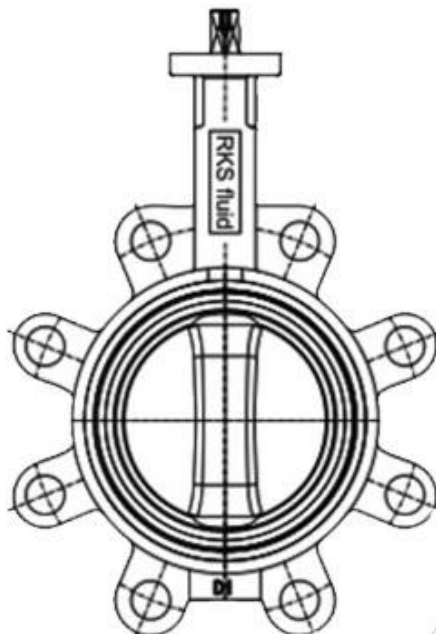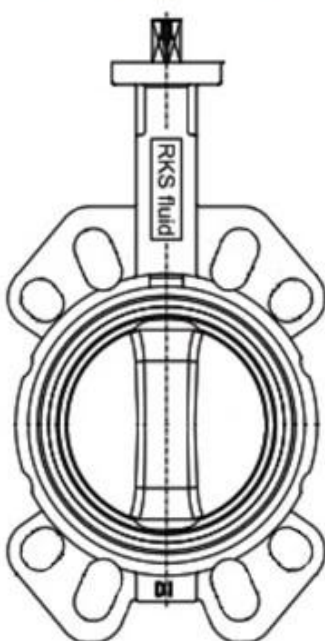

□□□□	DN32 - DN2400 □NPS1 1/4 -NPS96)
□□□□□ □□□□□□□	PN6 - PN10 - PN16 (150 □□□□□)

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY INFORMATION



مجال العمل: منتجات التحكم في السوائل والتكنولوجيا ومنتجات حماية البيئة أ

المتقدمة ، وخلايا العمليات المهنية ، ومعدات اللحام الواسعة المدى ، وخطوط التجميع التلقائية CNC مراكز تصنيع ii والطلاء.

وحدة مرجعية قياسية الصين ، للمشاركة في تطوير معايير صناعة الصمامات ذات الصلة

أنشأنا مركزًا للبحث والتطوير في هيوستن ، تكساس ، في الولايات المتحدة iv

v معيار المنتج GB ، German Standard ، American Standard ، Tuv CE ، ISO 9001 ، ADWO-2000 ، TS ، PED ، WRC WRAS ، KTW ، API 6D ، API609.

السادس الإنتاج الرئيسي: [صمام الفراشة](#)، صمام الكرة ، صمام بوابة ، صمام فحص ، صمامات الكرة الأرضية ، تجهيزات الأنابيب ، المحرك اليدوي / الهوائي / الكهربائي ، أجزاء الصمام



01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Delivery



Payment



:□□□□□□□□

□□□□□□□□ □□□□ □□□□□□□□ □□ □□□ □ □□□□□□ □□□ □□□□ □□□ □□□ :□
 .□□□□□□□□ □□□□ □ □□□□□□□ □ □□□□□ □ □□□□□□□ □□□□ □ "□□□□□□" □□□□□□ :□

□□□□□ □□□□ □ □□□□□□□ □□□□□ □□□□□ □□ :□
 □□□□□□□ □□□□□ □ □□□□□□□□□ □ □□□□□□□□ :□. RKSfluid □□□□□□□□□ □□□□□□□□ □□□□□
 .□□□□□□□ □□□ □ □□□□□□ □□□□□ .□□□□□□□□□ □□□□□□□□□□□□□□□□

꺽꺽꺽꺽꺽꺽꺽꺽 꺽꺽꺽꺽" 꺽꺽 꺽꺽 :

꺽: RKSfluid .꺽꺽꺽꺽꺽 꺽꺽꺽 꺽꺽꺽꺽꺽꺽 꺽꺽꺽 꺽꺽 꺽꺽꺽 꺽꺽꺽꺽 꺽꺽꺽 꺽꺽 꺽꺽꺽꺽

꺽꺽꺽꺽꺽 꺽꺽꺽 :

.꺽꺽꺽꺽 꺽꺽 꺽꺽꺽꺽 꺽꺽꺽꺽 .꺽꺽 꺽꺽꺽 5 ~ 2 꺽꺽 꺽꺽꺽 꺽꺽 꺽꺽꺽꺽 꺽꺽꺽꺽꺽 :

꺽꺽 :

1 :꺽pc .꺽꺽꺽꺽꺽꺽 꺽꺽꺽꺽

꺽꺽꺽꺽꺽 꺽꺽꺽 꺽꺽 꺽꺽꺽 :

.꺽꺽꺽꺽 꺽꺽 꺽꺽꺽꺽 꺽꺽꺽 꺽꺽 꺽꺽꺽 .꺽꺽꺽꺽 꺽꺽꺽 꺽꺽꺽 꺽 꺽꺽꺽꺽꺽 꺽꺽 꺽 100 꺽꺽꺽 꺽꺽꺽꺽 :

꺽꺽꺽꺽 꺽꺽 꺽꺽꺽꺽 TUV 꺽 API 꺽 WRAS 꺽 CE 꺽 ISO.

꺽꺽 꺽꺽꺽꺽꺽 꺽꺽꺽꺽 DIN 꺽 ASME 꺽 BS EN 꺽 JIS 꺽 API 꺽 AWWA.

꺽꺽꺽꺽꺽꺽 꺽꺽꺽꺽 꺽꺽꺽꺽 꺽꺽꺽 꺽꺽꺽 꺽꺽꺽 꺽꺽 :

꺽: RKSfluid 꺽꺽꺽꺽 꺽꺽꺽꺽 꺽꺽꺽꺽꺽꺽 꺽꺽꺽 꺽꺽꺽꺽꺽 70 꺽꺽 꺽꺽꺽꺽 꺽꺽꺽꺽꺽 꺽꺽 꺽꺽꺽꺽 20 꺽꺽꺽

꺽꺽 꺽꺽꺽꺽꺽 꺽꺽꺽꺽 꺽꺽꺽꺽꺽 꺽꺽꺽꺽꺽 꺽꺽꺽꺽.