




1. **Universal Flange** : This type of flange is used for general purpose applications. It has a standard design with four bolt holes and a central threaded hole. It is made of carbon steel or stainless steel.

2. **High Pressure Flange** : This type of flange is used for high pressure applications. It has a standard design with six bolt holes and a central threaded hole. It is made of carbon steel or stainless steel.

The flange is a circular component that is used to connect two pipes. It is made of a material that is strong enough to withstand the pressure of the fluid flowing through the pipe. The flange is usually made of carbon steel or stainless steel.

The flange is used to connect two pipes. It is made of a material that is strong enough to withstand the pressure of the fluid flowing through the pipe. The flange is usually made of carbon steel or stainless steel.

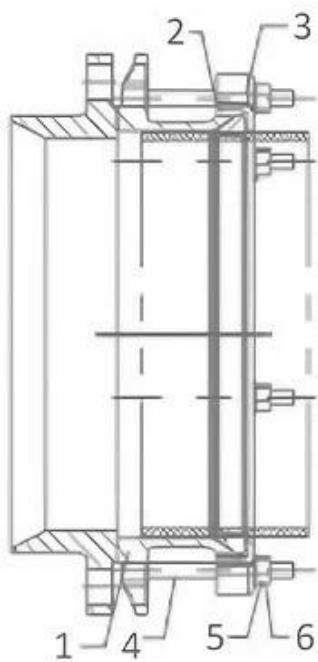

序号	名称	规格	标准
1	阀体	GGG50	EN1563
2	阀盖	GGG50	ISO4633
3	阀杆	GGG50	EN1563
4/5/6	阀座	阀座材料 4.8 阀座材料 14901 阀座材料 1092	ISO898
	阀座材料 14901 阀座材料 1092		
	阀座材料 1092		

COMPANY INFORMATION



VI පරිපූරක පනතින් පසුව ප්‍රදානය කළ ප්‍රතිපත්ති පිළිබඳව ප්‍රතිපත්ති පිළිබඳව ප්‍රතිපත්ති පිළිබඳව :ප්‍රතිපත්ති පිළිබඳව ප්‍රතිපත්ති පිළිබඳව / ප්‍රතිපත්ති / ප්‍රතිපත්ති පිළිබඳව ප්‍රතිපත්ති පිළිබඳව.



COMPANY EXHIBITION



COMPANY QUALIFICATION



Delivery



Payment



:0000000000

0000000000 000 00 000000 00 00 :1

A1: .0000000000 0000000000 0000000000 0000 000000 000000 90 000 15 00 00 .0000 10 000 5 00 000000 000000 00000 00000

0000000 000 00 00000 :2

A2: T/T 30% 00000 000 00 .000000 0000 0000000000 00 0000000000 0000 00000000 0000 00000000.

Q3: 0 000000 00 00000 0000 00000000 00000000 00

A3: .000000 00000000 000000000000 0000000000 0000000000 00 000 0 00000 0000 0000 000000 0000 0 0000

0000 000000 0000 00 00 :4

A4: .000000 00000000 00 00000000 0000 00000 .000000 00000 0000 0000 00000000

0000000000 0000 00 00000000 0000000000 00000 0000000 00 0000 0000000 000000 00000 0000 00 :5

00000000000 00000000000 00000000000000 00000000000 00000000 00000000000 000000 00000 0000 .%100 00000000 00000 :5

000000000 0000000 0000000000 00000000 0000000000 00000000 0000 00 000000 000000000000 000000000000 GB ASME API

DIN 000 000000 0000 ISO90012008 CE .00000000 000000 0

0000000000 0000000000 00000000 00 000000 0000000 00000 000000 0000000 00 :6

00000000 0000000 00 000 00000 00 00000 00 0000 .0000000000 0000000 70 00 000000 0000 0000000 0000 00000 000000 :6

.0000000000 000000000000 0000000 00000000000000

00000000 0000000000 000000 00000 00 000000 0000000 00000 0000 :7

00000 .0000000000 00 0000000 :7 Valve 0000 .0000000000 00000 0000000000 00 00000000 00000000 0000 000000 00000000

0000 00000000 0000 ISO90012008 CE TUV 000000000000.