


□□□□□□ □□□□□□ □□ □□ □□□□ □□□□□□ □□ □□□□□□ □□□□ □□□□ □□□□.

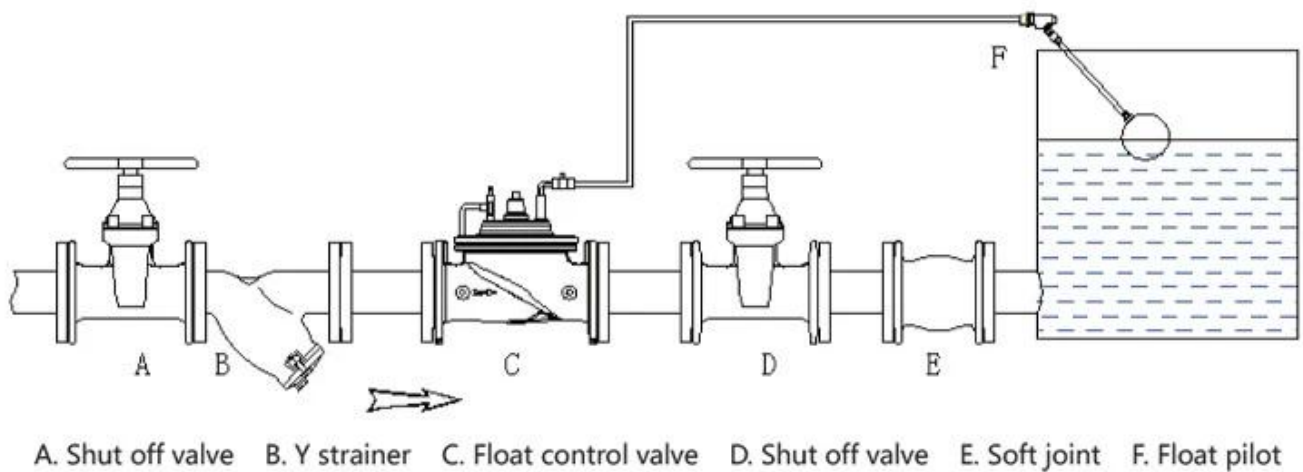

□□□□ □□□□ -

000000 000000 -
 000000 0000000 0000/00000000 -

0000	DN40-DN1200
000000000	000
00000 0000	0 °C ~ 70 °C
0000	000000 000/000000000000000 0000000000000000/00000000/000000000/0000000000

DN	□	□	H1	DN	□	□	H1
40	230	139	85	250	730	476	205
50	230	139	85	300	850	526	232
65	290	159	95	350	980	585	262
80	310	179	102	400	1100	624	292
100	350	214	112	500	1250	720	360
125	400	278	127	600	1450	835	424
150	480	333	145	800	1850	1110	515
200	600	407	172	1000	2250	1350	630





- [illegible]

COMPANY FACTORY



01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners

00000000 0000 0000000000 00 000 0 0000000 0000 000000 0000 0000 :0

□□□□□ □□□□ □ □□□□□□□□ □□□□□ □□□□□ □□ :□

□□□□□□□□ □□□□ □□ □□ :□

□□□□□□ □□□□ : □

□□□ : □

1 : pc . 00000000 00000000

□□□□□□ □□□□ □□ □□□□ :□

.0000000 00 000000 000000 00 000000.000000 00000 0 00000000 0000 0 100 0000 00000000 :0

□□□□□ □□□ □□□□□ TUV □ API □ WRAS □ CE □ ISO.

□□ □□□□□□ □□□□□□ DIN □ ASME □ BS EN □ JIS □ API □ AWWA.

□□□□□□□□ □□□□□□ □□□□□□ □□□□ □□□□□□ □□□□□□ □□□□ □□□□ :□

A: RKSfluid 1000000 100000 100000 1000000 100000 1000000 70 10 100000 100000 20 100000 1000000
10 1000000 1000000 1000000.