


RKSfluid®
Proven Technology-Superior Features-Legendary Value



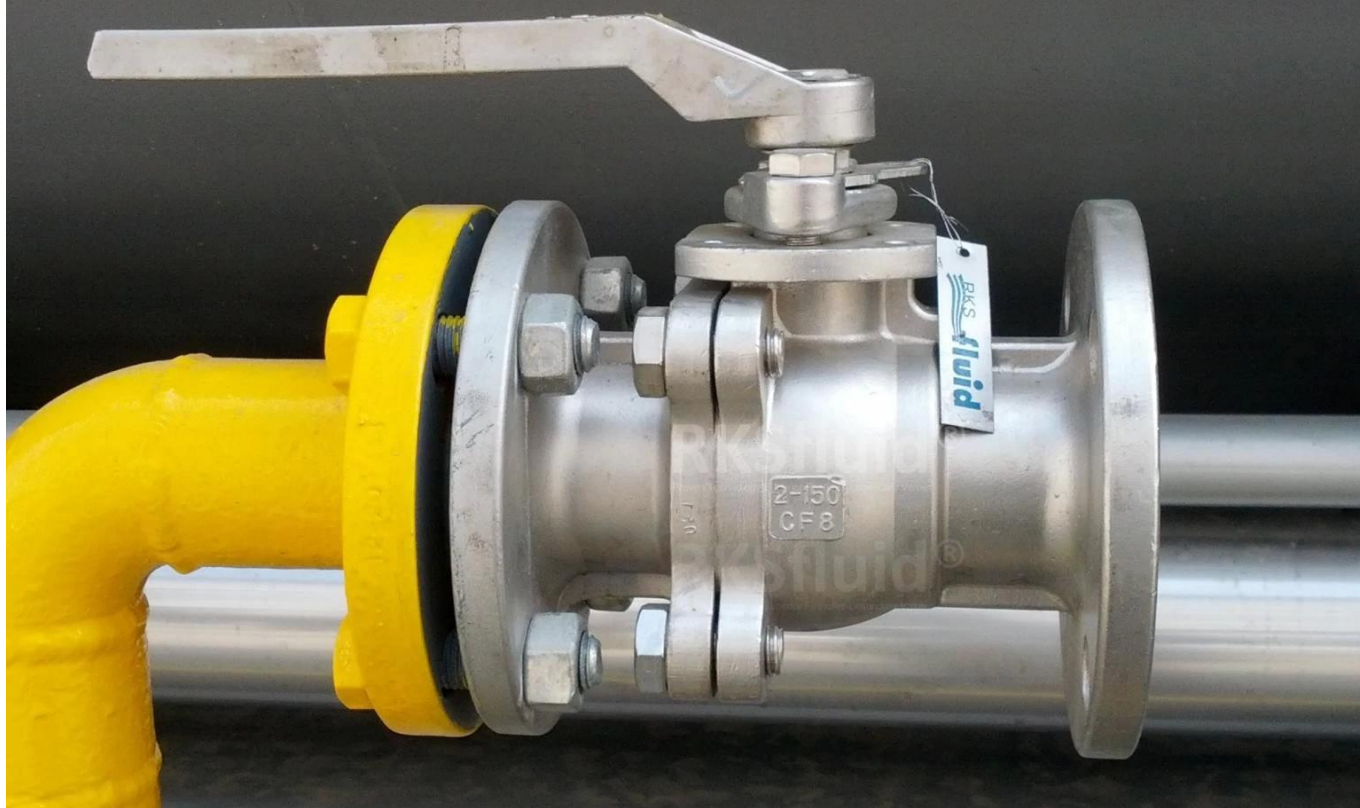

2PC球閥API6D標準ISO5211標準CF8 / CF8M / WCB150LB300LB

標準規格: API 6D, ISO 5211, CF8 / CF8M / WCB, 150LB, 300LB
 適用流体: 水, 油, 蒸汽, 空气, 惰性气体
 适用温度: -20°C ~ +180°C
 适用压力: 1.6MPa ~ 10.0MPa

RKSfluid 提供各種規格之球閥, 歡迎垂詢。
 規格: A105, WCB, C5, WC6, WC9, CF8, CF8M, 316, API 6D, ASME, ANSI, IS, DIN, BS, GB



規格
 適用溫度: -20°C ~ +180°C

材料 WCB / CF8 / CF8M / CF3 / CF3M
连接形式 法兰/螺纹/焊接
口径 150LB-600LB
压力 1/2"~12" DN15-DN300



Partners



PTFE lined butterfly valve



Resilient seat butterfly valve



Double offset butterfly valve



Triple offset butterfly valve



Ball valve



Pipe fittings

Our Factory



Company Advantages

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



□ □

□ □

[illegible][illegible]

V[®] GB TÜV CE ISO 9001 ADWO-2000 TS PED WRC WRAS KTW API 6D API609

[illegible]

Exhibition Photos



Our Certificates



□□□□

□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□
□□□□□□□□□□□□ RKSfluid □□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□
□□ RKSfluid □□□□□□□□□□□□□□□□

□□□□□□□□
□□□□□□□□□□2□5□□□□□□□□□□□□□□□□□

□□□□□□
□□□□□□□□1pc□

□□□□□□□□□□
□□□□□□□□100□□□□□□□□2□□□□□□□□□□□□□□□□□
□□□□□□□□TUV□API□WRAS□CE□ISO□□□□
□□□□□□□□DIN□ASME□BS EN□JIS□API□AWWA□

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

RKSfluid 2070