

DESIGN FEATURES




Features



- Use AkzoNobel material.
- Super Anti-corrosion
- Epoxy powder coating 200-250um,
- Baking varnish over 200°C,

NO.		
1	Body	GGG50
2	Dise	GGG40+EPDM
3	Wedge nut	C48600
4	Stem	SS431
5	Bonnet	GT450-10
6	Gasket	EPDM
7	Y-ring	EPDM85-90
8	Fix ring	CuZn21Si3/C69300
9	Thrust bearing	C69300
10	Seal ring	EPDM70
11	O ring	NBR
12	Retainer ring	POM
13	Bushing ring	POM
14	Gland	SS431
15	Dustproof ring	EPDM85
16	Dise core	GGG40
17	Bolt	SS316

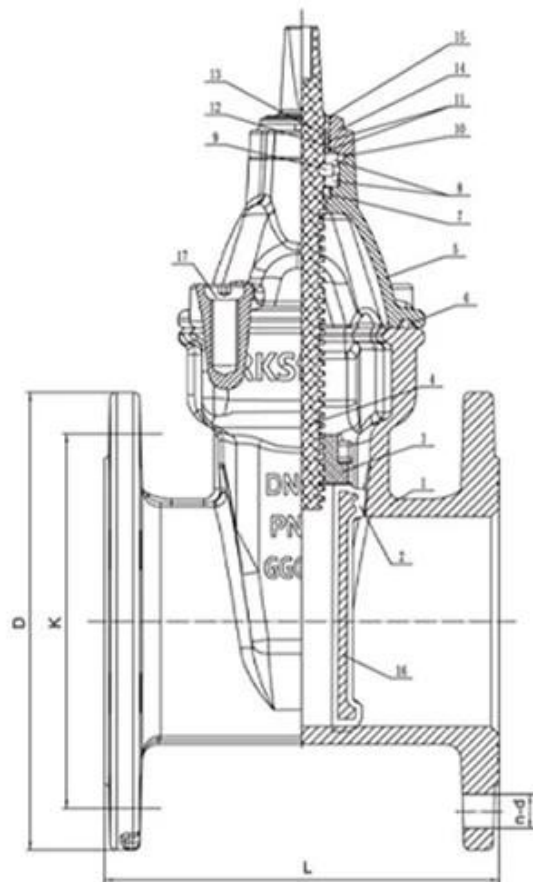



Free wedge nut, **reduces the stem bending forces** and at the same time enables it to be easily replaced.



The more compact new cap, reduces the water retention areas in order to **reduce the risk of bacterial growth**.



One piece stainless steel stem in for **better resistance to axial load and to with stand higher operating torques**.



Three locking tab for bayonet system prevents self-dismantling.



Dust guard integrating three O-ring shape, **prohibiting the introduction of foreign bodies** at the stem.



Male guiding system with composite sliding skate reduces the wear of the wedge against the body, allowing a smooth functionality and a longer life time of the valve.



Triple seal at the operating stem to ensure tightness with the test of time (2500 cycles).



New male composite sliding skate technology ensuring a low operating torque even under high differential pressure and preventing damage or corrosion generated by the friction.



APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



i 工厂占地面积约 10000 平方米

ii 拥有 CNC 加工中心约 50 余台

iii 拥有各种规格的压力容器约 100 余台

iv 拥有各种规格的换热器约 100 余台

v 拥有 GB 标准压力容器 TUV CE ISO 9001 ADWO-2000 TS PED WRC WRAS KTW KTW API 6D API609

VI 拥有各种规格的法兰约 1000 余套 / 吨 / 年

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Delivery



Payment



Faq

Q: What is the minimum order quantity?
A: 100 units per model.

Q: What is the lead time?
A: 15-20 days for RKSfluid, 20-25 days for hydraulic components.

Q: What is the warranty?
A: 1 year warranty for RKSfluid, 6 months for other components.

Q: What is the payment method?
A: T/T, L/C, Western Union, Escrow, etc.

Q: What is the shipping method?
A: By sea or by air.

Q: What is the certification?
A: ISO 9001, CE, API, WRAS, TUV, DIN, ASME, BS EN, JIS, AWWA.

Q: What is the price?
A: RKSfluid 20-70, other components 10-50.