

CAV 3F2F - 3F2F (3F2F)

3F2F

3F2F

3F2F

3F2F


PP2F

3F2F

3F2F

3F2F EN-GJS500-7 3F2F PE/PP 3F2F NBR 3F2F SUS304



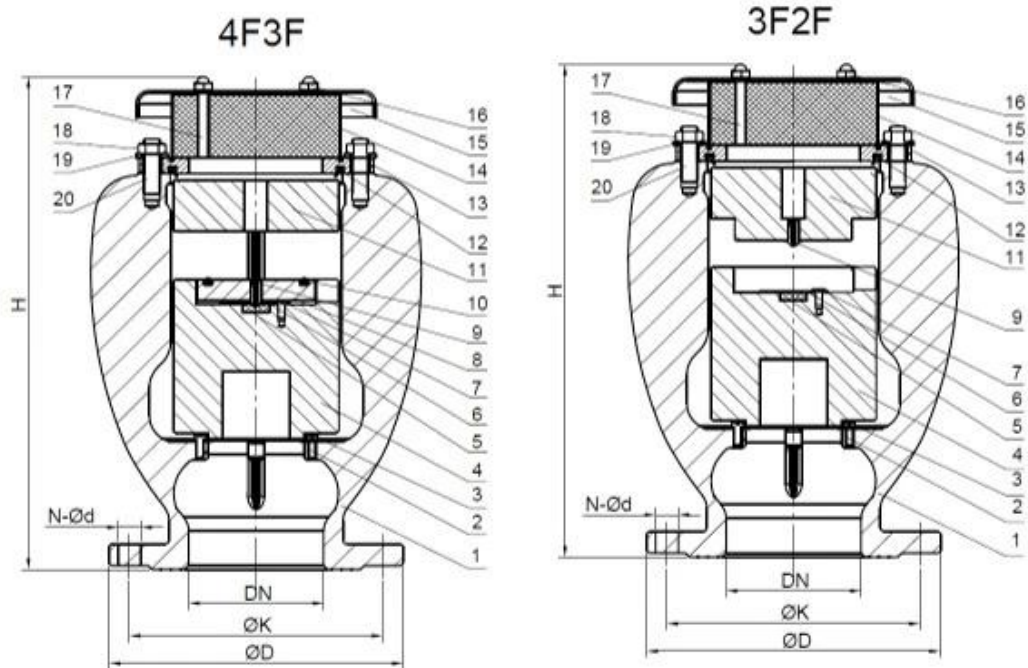

□□□□

CAV □□-□□ (4F3F)

CAV □□□ - □□□ (3F2F)

DN	ΦD(mm)				ΦK(mm)				N-Φd(mm)				Full Bore		Reduced Bore	
	PN10	PN16	PN25	PN40	PN10	PN16	PN25	PN40	PN10	PN16	PN25	PN40	H(mm)	Weight (kg)	H(mm)	Weight (kg)
50	165				Φ125				4-Φ19				220	14.5	-	-
80	200				Φ160				8-Φ19				300	26	220	15.5
100	220		235		Φ180		Φ190		8-Φ19		8-Φ23		370	34	300	28
150	285		300		Φ240		Φ250		8-Φ23		8-Φ28		520	70	370	39
200	340		360	375	Φ295		Φ310	Φ320	8-Φ23	12-Φ23	12-Φ28	12-Φ31	650	129	520	76
250	395	405	425	450	Φ350	Φ355	Φ370	Φ385	12-Φ23	12-Φ28	12-Φ31	12-Φ34	800	185	650	139
300	445	460	485	515	Φ400	Φ410	Φ430	Φ450	12-Φ23	12-Φ28	16-Φ31	16-Φ34	980	286	800	205

[illegible]

[illegible][illegible][illegible]

□ □

[illegible]

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Delivery



Payment



□□□□

□: □□□□□□□□□□□□□□

□□□□"□□□□□□□□□□□□□□

□: □□□□□□□□□□□□□□

□□□□□□□□□□□□□□ RKSfluid □□□□□□□□□□□□□□□□□□

□: □□□□□□□□□□

□□□ RKSfluid □□□□□□□□□□□□□□□□□□

□□□□□

□□□ □□□□□ 2~5 □□□□□□□□□□□□□□□□

□: □□□□□

□: □□□□ 1 □□

□: □□□□□□□□

□: □□□ 100% □□□□□2 □□□□□□□□□□□□□□

□□□□□ TUV□API□WRAS□CE□ISO □□□

□□□□□ DIN□ASME□BS EN□JIS□API□AWWA□

□: □□□□□□□□□□□□□□□□□□

□□□ RKSfluid □□27□□□□70□□□□□□□□□□□□□□□□□□□□□□