



DESIGN FEATURES



This series of butterfly valves are used for industrial pipelines, as bi-directional open and close and regulation devices, the adjustment range is from 40°C-90°C full open. Suitable temperature $\geq 80^{\circ}\text{C}$

Features

- Size range DN100-1200mm
- Standard-ISO/BS/DIN/AWWA/API
- Tests Standard-BS EN 12266-1
- Body-Ductile Iron/Cast Iron/Stainless Steel /WCB
- Body Ring-SS420/SS304/SS316
- Disc Ring-EPDM
- Shaft-SS420/SS431/SS316
- Fusion bonded epoxy coating-Min 300 Microns

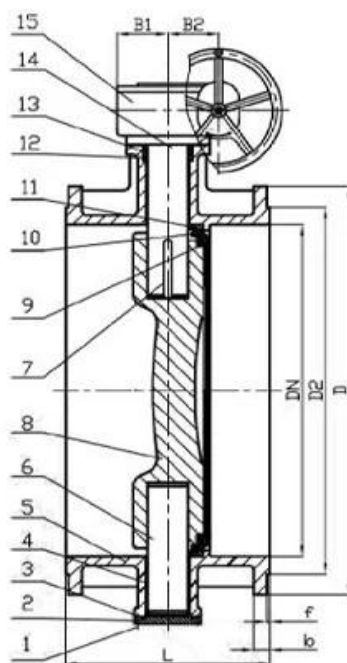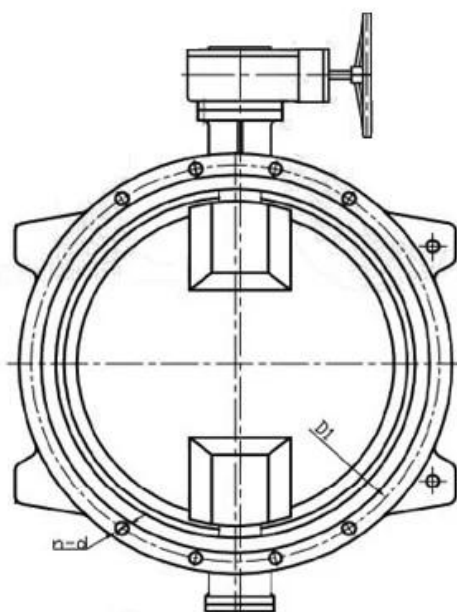

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



i 工厂地址：中国山东省潍坊市青州市

ii CNC 加工中心：拥有多台高精度 CNC 加工中心

iii 检测设备：配备先进的检测设备

iv 质量管理体系：通过 ISO 9001 认证

v 产品符合 GB 标准，并通过 TUV CE、ISO 9001、ADWO-2000、TS、PED、WRC WRAS、KTW、KTW、API 6D、API609 等认证

VI 工厂地址：中国山东省潍坊市青州市 / 邮编：261000



COMPANY QUALIFICATION



COMPANY EXHIBITION



□□□□□

□□□□□□□□□□□□□□□□
 □□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□
 □□□□□□□hrdraulic□□□□□□RKSfluid□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□
 □□RKSfluid□□□□□□□□□□□□□□

□□□□□□□□
 □□□□□□□2□5□□□□□□□□□□□□□□□□□□□□□□□□

□□□
 □□□□□□□1□□

□□□□□□□□□□□□
 □□□□□100□□□□□□□2□□□□□□□□□□□□□□□□□□
 □□□□□TUV□API□WRAS□CE□ISO□□□□
 □□□□□DIN□ASME□BS EN□JIS□API□AWWA□

□□□□□□□□□□□□□□□□□□
 □□RKSfluid□□20□□□□□□□□70□□□□□□□□□□□□□□□□□□□□□□