



1. 管口密封性能良好，能有效防止液体泄漏。

 2. 安装简便，无需焊接或螺栓固定。

1. 管口


管口密封性能良好，能有效防止液体泄漏。

2. 管口

管口密封性能良好，能有效防止液体泄漏。

3. 管口

管口密封性能良好，能有效防止液体泄漏。

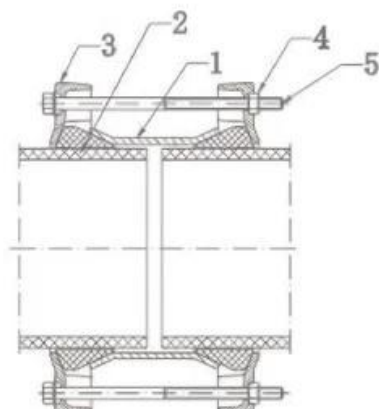

1	2	3	4
1	2	GGG50	EN1563
2	3	4	ISO4633
3	4	GGG50	EN1563
4/5/6	5	6.8	ISO898
	6	7	BS EN 14901



COMPANY INFORMATION



I 工厂概况

II 工厂主要设备

III 工厂主要工艺

工厂主要设备

V 工厂主要设备 TUV CE ISO 9001 ADWO-2000 TS PED WRC WRAS KTW API 6D API609

工厂主要设备 / 工厂主要设备



COMPANY EXHIBITION



COMPANY QUALIFICATION



□□□□□

Q1: □□□□□□□□

A1: □□□□□□□□□□ 5-10 □□□□ 15-90 □□□□□□□□□□□□□□

Q2: □□□□□□□□

A2: T/T 30% □□□□□□□□□□□□□□□□□□□□□□□□

Q3: □□□□□□□□□□

A3: □□□□□□□□□□□□□□□□□□□□□□□□

Q4: □□□□□□□□□□

A4: □□□□□□ 1 □□□□□□□□□□□□□□□□

Q5: □□□□□□□□□□□□□□□□□□□□□□□□

A5: □□□100% □□□□□□□□□□□□□□□□□□□□□□

