


Blue SLAM Valve

- Compact design
 - Low noise
 - Low head loss
- Features
- Streamlined design
 - Anti-erosion design
 - Self-cleaning stem
 - Long time smooth operation
 - Backflow velocity only 0.2m/s
 - EN 558-1 / ISO 5752 / EN 1092-2 / ISO 7005-2




- Streamlined, minimum noise
- Backflow velocity only 0.2s, Head loss 0.1bar with 2m/s
- EPDM/NBR Rubber fully coated disc
- Anti-erosion design. Self-adjusting ball
- Self-cleaning stem, Long time smooth operation

Size	DN50 -DN600 / NPS2 -NPS24
Pressure	PN10/16/25
Temperature	0°C - +80°C
Material	Cast Iron
Coating	Blue
Standard	GB/T 12235-2007
EN 558-1	EN 558-1
EN 1092-2	EN 1092-2

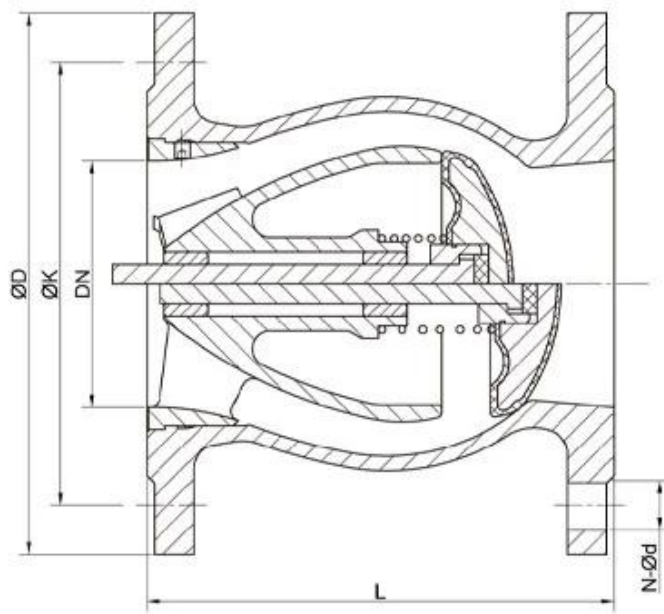

NPS2-NPS14 (DN50-DN350)

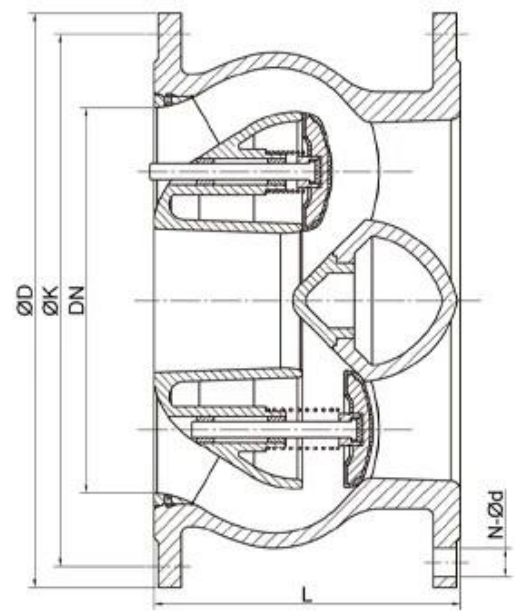

NPS16-NPS24 (DN400-DN600)



COMPANY INFORMATION



i 工厂内部环境

ii CNC 加工中心

iii 仓库

iv 办公室

v 工厂符合 GB 标准，通过 TUV CE、ISO 9001、ADWO-2000、TS、PED、WRC、WRAS、KTW、KTW、API 6D、API609 认证

vi 工厂位于中国浙江省宁波市，交通便利，/ 工厂 / 工厂

COMPANY FACTORY



01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



□□□□

□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□
□□□□□□□hrdraulic□□□□□RKSfluid□□□□□□□□□□□□□□□□

□□□□□□□□□□
□□RKSfluid□□□□□□□□□□□□□□

