



- Wear-resistant, adapt to different working conditions
- Acid and alkali resistance, high porosity, good gas permeability, high dust collection efficiency



- Not easy to deform, high tensile strength
- Strengthen the outer lining seam, set value filtration, better stability
- Suitable for high viscosity materials and hard particle impurity filtration

- Rigorous structure , heat-treated material surface no depilation
- Hot melt seamless, no side leakage, no chemical release
- Use medium and low viscosity fluids, high flow rate intercept solid and soft particles



- Multi-layer structure, filtration efficiency is higher than 95%
- Deep structure gradient filtration, increase the filtration area and pollution capacity
- Hydrophobic and lipophilic, ensuring oil absorption speed and oil absorption

- Lipophilic and hydrophobic
- A sufficient pollution capacity, higher filtration accuracy
- Good sealing performance



- Not easy to deform, high tensile strength
- Suitable for frequent replacement, soft and hard particles, sufficient pollution capacity
- Adapt to any standard or customized non-standard filter

- Zero leakage, zero sources of pollution
- Suitable for frequent replacement, soft and hard particles, sufficient pollution capacity
- Good chemical compatibility, integrated filter bag handle, easy to replace





- Adapt to different working conditions
- Suitable for temperatures below 125°C, better resistance to organic solvents, oxidants, inorganic and organic acids

- High temperature resistance, high strength, acid and alkali corrosion resistance, wear resistance, folding resistance, easy cleaning, water and oil proof, anti-static
- Adapts to different temperature zones
- Low price and wide application




- Significant temperature resistance
- Good chemical resistance, adapt to different working conditions
- Low backflush pressure, high elastic de-filtering efficiency

- Withstand high temperature, suitable for high temperature of flue gas
- Suitable for collection by electric dust collector



- High strength, chemical resistance
- Suitable for harsh environments, adapts to different temperature zones

- Good heat resistance, good dust stripping, reduced energy consumption
- Anti-corrosion, better acid and alkali resistance
- No water absorption, no moisture absorption
- High filtration efficiency

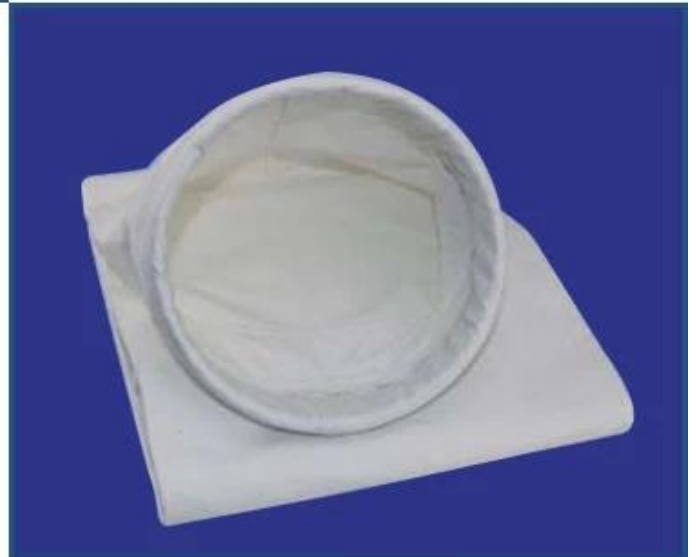



- Chemical resistant, filter bag chemically stable, not burn-in
- Dust removal efficiency is up to 99.99%
- Low pressure loss and low cost of consumables
- Suitable for flue gas purification, dust removal, dust control and material recovery

## Our Factory



## Company Advantages

01

21 years of professional experience

03

Independent research and development team  
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



1. 1. 21 years of professional experience
2. 2. 28 top senior professional researchers
3. 3. 100% high level ex-factory inspection
4. 4. 2 years quality assurance, repair and replacement

## Exhibition Photos



## Our Certificates



**RKSfluid®**

Tel: 024 2318 0188-899

Email/Skype: ivory@rksfluid.com

Mobile/WhatsApp/Wechat: +86 15140071761

Add: Pump & Valve Industrial Park, No. 5 Panwu Road,  
Liaozhong Dist. Shenyang, Liaoning P.R. China

□□□□

Q1□□□□□□□□□□

A1□□□□□□□□□□□□□□

Q2□□□□□□□□

A2□□□□□5-10□□□□□□□□□□□□□□15-90□□

□□3□□□□□□□□

A3□T / T 30□□□□□□□□□□□□□□□□□□□□□□□□

Q4□□□□□□□□□□□□□□□□□□□□

A4□□□□□□1pc□□□□□□□□□□□□□□□□

Q5□□□□□□□□□□□□□□□□

A5□□□□100□□□□□□□□□□□□

Q6□□□□□□□□□□□□□□□□

A6□□□□□□□□□□□□□□□□□□□□□□□□

□□7□□□□□□□□□□□□

A7□□□1□□□□□□□□□□□□□□□□