



PRODUCT STRUCTURE



Features

- Size range DN100-1200mm
- Standard-ISO/ BS/DIN /AWWA/API
- Tests standard-BS EN 12266-1
- Body-Ductile Iron/Cast Iron/Stainless Steel/WCB
- Body Ring-SS420/SS304/SS316
- Disc Ring-EPDM
- Shaft-420/S5431/SS316
- Fusion bonded epoxy coating- Min 300 Microns

This series tilting check valves are suitable to be used at the exit of the pump whose medium is water. It is used to prevent or reduce medium back from water hammer. So it can protect the pipeline system. Suitable temperature $\leq 80^{\circ}\text{C}$

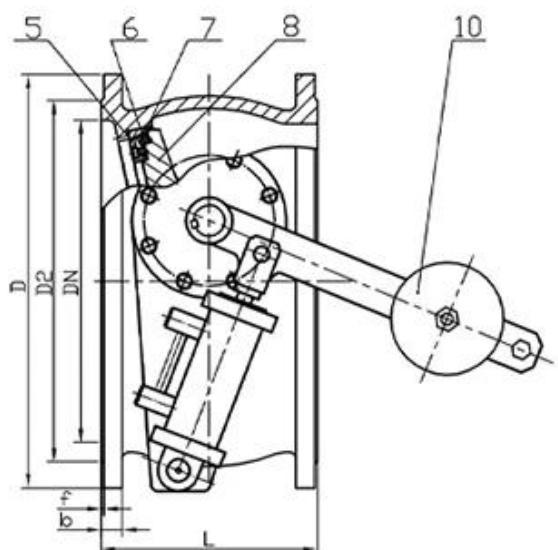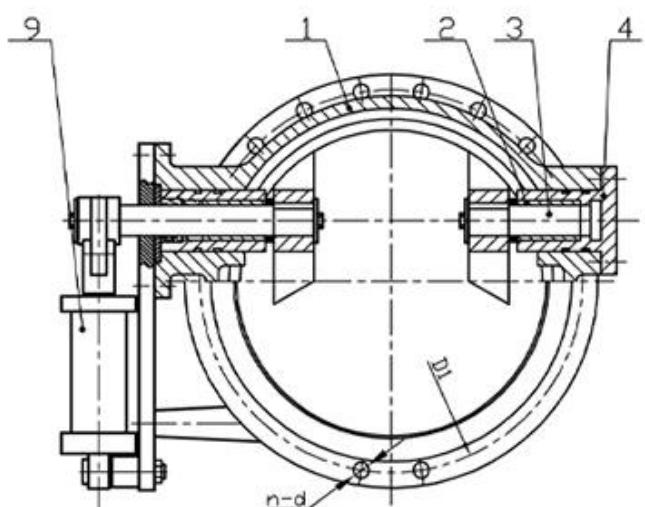

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



i 中国通过ISO9001质量管理体系认证

ii CNC加工中心、车床、铣床、磨床等设备

iii 通过CE、ISO9001、TS、PED、WRC、WRAS、KTW、API6D、API609认证

iv 通过GB、TUV、CE、ISO9001、ADWO-2000、TS、PED、WRC、WRAS、KTW、KTW、API6D、API609认证

VI 通过ISO9001质量管理体系认证 / ISO / CE / PED / WRC / WRAS / KTW / KTW / API6D / API609

-
- 01** 21 years of professional experience
 - 02** 4 factories
 - 03** Independent research and development team
28 top senior professional researchers
 - 04** 2 professional testing centers
 - 05** 100% high level ex-factory inspection
 - 06** High quality imported materials
 - 07** 2 years quality assurance, repair and replacement

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Delivery



Payment



Гидравлические
системы

Гидравлические системы
“Гидравлик”

Гидравлические системы
“Гидравлик” hydraulic RKSfluid Гидравлические системы

Гидравлические системы
“Гидравлик” RKSfluid Гидравлические системы

Гидравлические системы
“Гидравлик” 2015 Гидравлические системы

Гидравлические системы
“Гидравлик” 100

Гидравлические системы
“Гидравлик” 100 Гидравлические системы
Гидравлические системы TUV API WRAS CE ISO
Гидравлические системы DIN ASME BS EN JIS API AWWA

Гидравлические системы

RKSfluid 2070