

RKSfluid®



RKSfluid®



RKSfluid®



RKSfluid®



RKSfluid®



RKSfluid®



RKSfluid®



RKSfluid®



DESIGN FEATURES

DURABLE

- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%


ANTI-CORROSION

- Material: Epoxy powder:  , Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment



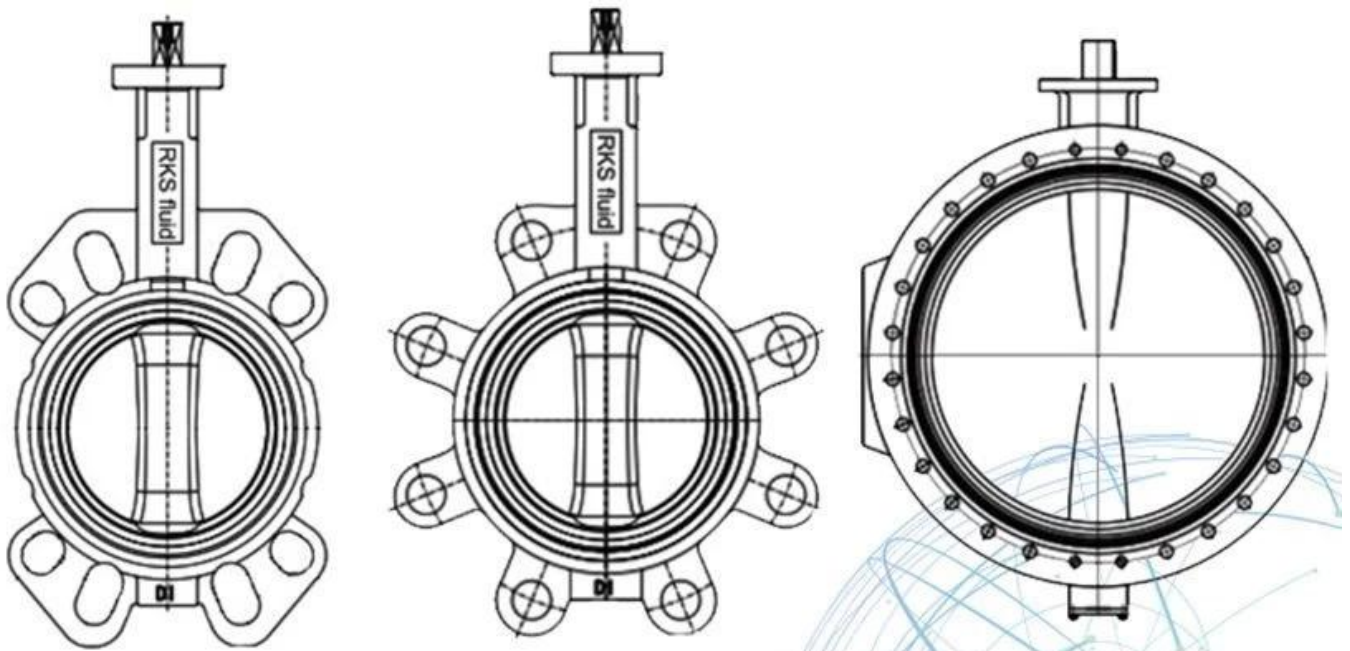

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport

Our Factory



Exhibition Photos



RKSfluid 1997

CNC

RKS

GB ISO TUV CE ADWO- 2000

ISO9001 TS API

“ ”

I

II CNC

III

IV

V符合GB符合TUV CE符合ISO 9001符合ADWO-2000符合TS符合PED符合WRC
WRAS符合KTW符合API 6D符合API609

符合/符合/符合

