


PRODUCT STRUCTURE

Features

- Size range DN100-1200mm
- Standard-ISO / BS/DIN /AWWA/API
- Tests standard-BS EN 12266-1
- Body-Ductile Iron/Cast Iron/Stainless Steel/WCB
- Body Ring-SS420/SS304/SS316
- Disc Ring-EPDM
- Shaft-420/S5431/SS316
- Fusion bonded epoxy coating- Min 300 Microns

This series tilting check valves are suitable to be used at the exit of the pump whose medium is water. It is used to prevent or reduce medium back from water hammer. So it can protect the pipeline system. Suitable temperature $\leq 80^{\circ}\text{C}$

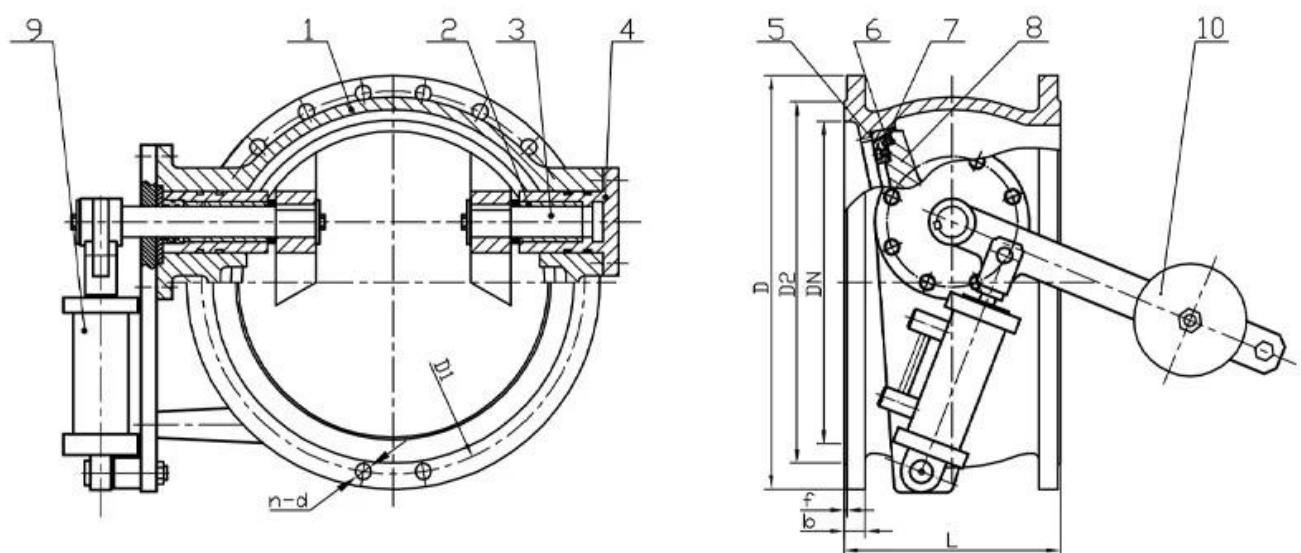

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



i 1000 sets of pipe fittings per day

ii CNC pipe cutting machine, pipe bending machine

iii Pipe fittings production line

iv Pipe fittings production line

v GB, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC, WRAS, KTW, KTW, API 6D, API 609

VI Pipe fittings production line / 100 / 1000 sets per day

-
- 01** 21 years of professional experience
 - 02** 4 factories
 - 03** Independent research and development team
28 top senior professional researchers
 - 04** 2 professional testing centers
 - 05** 100% high level ex-factory inspection
 - 06** High quality imported materials
 - 07** 2 years quality assurance, repair and replacement

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Delivery



Payment



1

The image consists of two identical horizontal rows of ten empty rectangular boxes. The top row is positioned above the bottom row. These boxes are intended for labeling specific components or regions within a larger figure that is not shown in the image.

Hydrodynamic fluid simulation

RKSfluid

□□□□□□□
□□□□□□□25□□□□□□□□□□□□□□□□□□□

ISO 9001
ISO 10002
TUV API WRAS CE ISO
DIN ASME BS EN JIS API AWWA

□□□□□□□□□□□□□
□□RKSfluid□□20□□□□□□70□□□□□□□□□□□□□□□□□□□□□□