


100%

20 DN25 DN32 DN40 DN50

DN20-32 DN40-50 DI

- BSPP BSPT NPT
- 100%
- 100%
-
-
- WRAS
- EN-12266-1 A
- EN1074-2
- BSP EN10226/1 EN ISO 228-1 G NPT

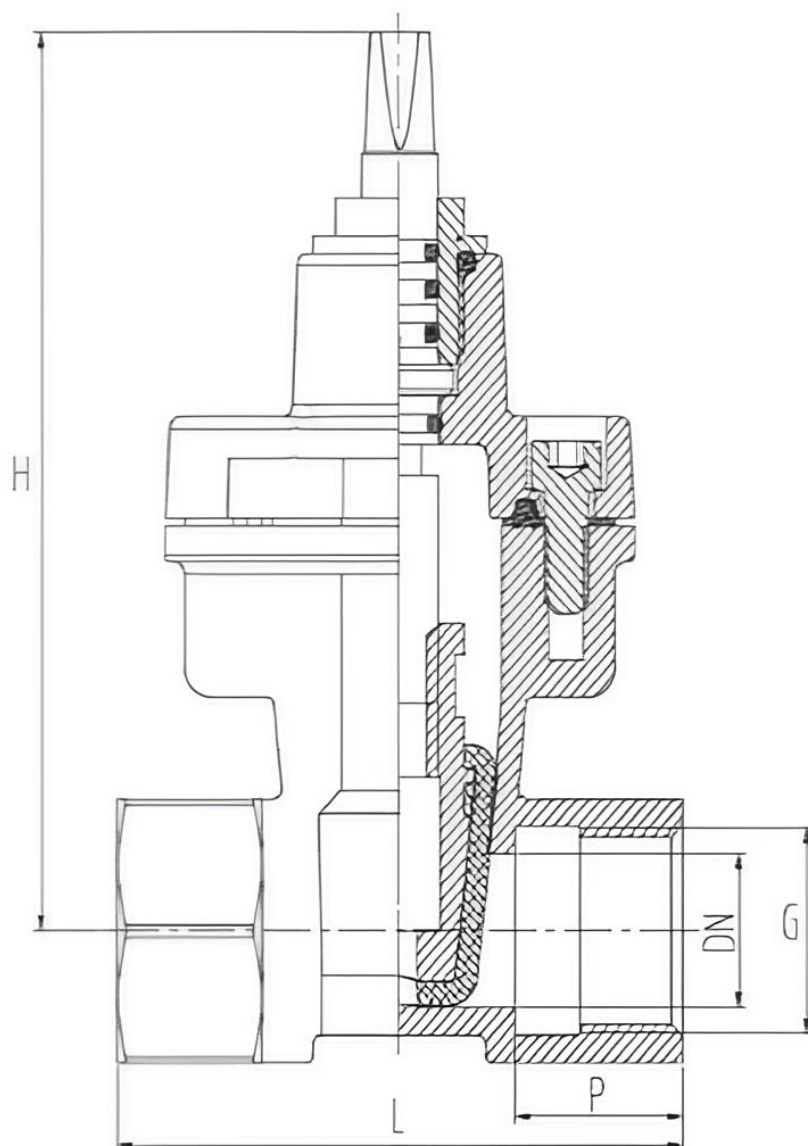

口径	G螺纹BSP 英寸	L (mm) 英寸	重量	连接尺寸	安装尺寸
DN20	3/4"	95	145	27	15mm
DN25	1"	105	145	30	15mm
DN32	1 1/4 英寸	120	150	32	15mm
DN40	1 1/2 英寸	130	202mm	37	30mm
DN50	2英寸	150	197	45	30mm



APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



I 工厂概况

II 工厂历史

III 工厂产品

工厂资质

V 工厂认证 TUV CE ISO 9001 ADWO-2000 TS PED WRC WRAS KTW API 6D API609

工厂地址 工厂电话 工厂邮箱 工厂网站

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Delivery



Payment



F

□: □□□□□□□□□□□□□□
□□□□"□□□□□□□□□□□□□□

□: □□□□□□□□□□□□□□
□□□□□□□□□□□□□□ RKSfluid □□□□□□□□□□□□□□□□□□

□: □□□□□□□□□□
□□□ RKSfluid □□□□□□□□□□□□□□□□□□

□□□□□□
□□□ □□□□□ 2~5 □□□□□□□□□□□□□□□□□□

□: □□□□□
□: □□□□ 1 □□

□: □□□□□□□□
□: □□□ 100% □□□□□2 □□□□□□□□□□□□□□□□
□□□□□ TUV□API□WRAS□CE□ISO □□□□
□□□□□ DIN□ASME□BS EN□JIS□API□AWWA□

□: □□□□□□□□□□□□□□□□□□

RKSfluid 2770