


## PRODUCT STRUCTURE

### Features

- Size range DN100-1200mm
- Standard-ISO / BS/DIN /AWWA/API
- Tests standard-BS EN 12266-1
- Body-Ductile Iron/Cast Iron/Stainless Steel/WCB
- Body Ring-SS420/SS304/SS316
- Disc Ring-EPDM
- Shaft-420/S5431/SS316
- Fusion bonded epoxy coating- Min 300 Microns

This series tilting check valves are suitable to be used at the exit of the pump whose medium is water. It is used to prevent or reduce medium back from water hammer. So it can protect the pipeline system. Suitable temperature  $\leq 80^{\circ}\text{C}$

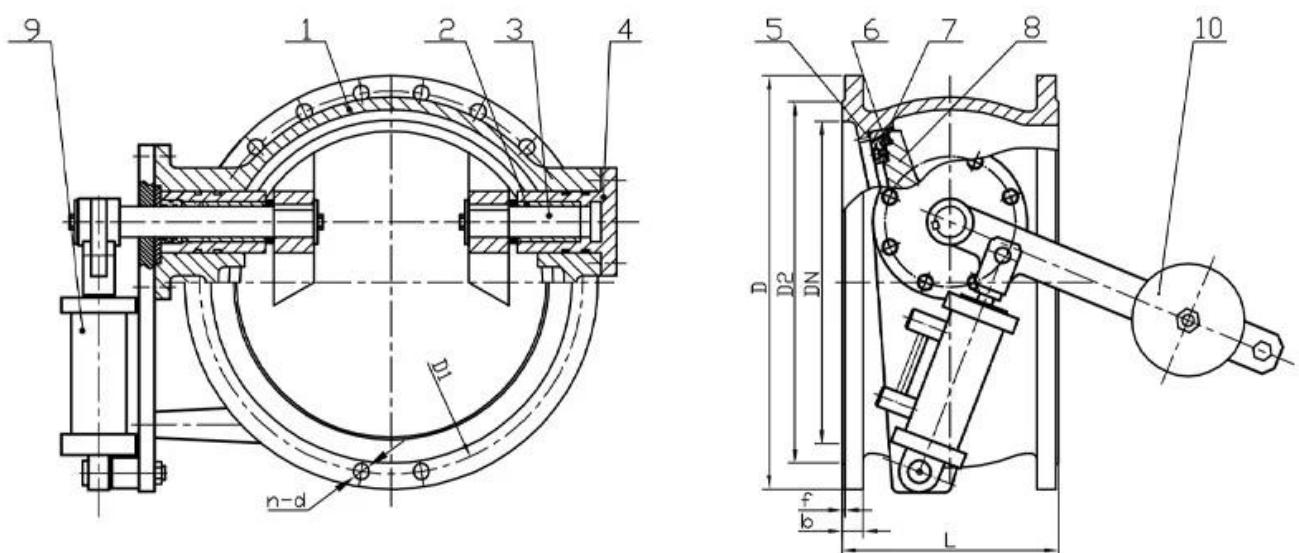

## APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



## COMPANY FACTORY

---



## COMPANY INFORMATION



I 『中華人民共和國水質標準』

II 『歐洲CE認證標準』

III 『歐洲PED指令標準』

IV 『歐洲TS指令標準』

V 『TUV CE ISO 9001 ADWO-2000 TS PED WRC WRAS KTW API 6D API609』

『歐洲EN標準/美國ASME標準/中國GB標準』

**01**

21 years of professional  
experience

**03**

Independent research and  
development team  
28 top senior professional  
researchers

**05**

100% high level ex-factory  
inspection

**07**

2 years quality assurance,  
repair and replacement

4 factories

**02**

2 professional testing  
centers

**04**

High quality imported  
materials

**06**

## COMPANY QUALIFICATION



## COMPANY EXHIBITION



1

□: □□□□□□□□□□  
□□□□□□□□□□

□: □□□□□□□□□□□□  
□□□□□□□□□□□□ RKSfluid □□□□□□□□□□□□□□

□: □□□□□□□□□  
A] RKSfluid □□□□□□□□□□□□

□□□□□  
A □□□□ 2~5 □□□□□□□□□□□□□□

□: □□□□  
□: □□□□ 1 □

□: □□□□□□□  
□: □□ 100% □□□□2 □□□□□□□□□  
□□□□ TUV□API□WRAS□CE□ISO □□  
□□□ DIN□ASME□BS EN□JIS□API□AWWA□

A: RKSfluid 20/70