

□□

□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□

□□□□□□□□□□

- □□□□□□□□□□□□□□□□□□□□

- □□□□□□□□□□□□

□□□□□□□□□□

□□□□□□□□□□□□□□□□□□

□□□□□□□□

- □□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□

- □□□□□□□□□□□□□□□□□□


- □□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□

Size	DN40-DN1200
Working Medium	Water
Temperature	0°C~70°C
Material	Ductile Iron/Stainless Steel/Cast Steel/Bronze/Aluminum Alloy
Design Standards	CJ/T 219 & JB/T 10674 & EN 1074-5
Pressure Level	PN10, PN16, PN25
Stress Test Standard	GB/T 13927 & ISO 5208 & EN12266-1
Flange drilling standard	GB17241.6; EN1092-2; ISO7005-2; ANSI / JIS / AS2129
Structure Length	GB 12221 & EN558-1

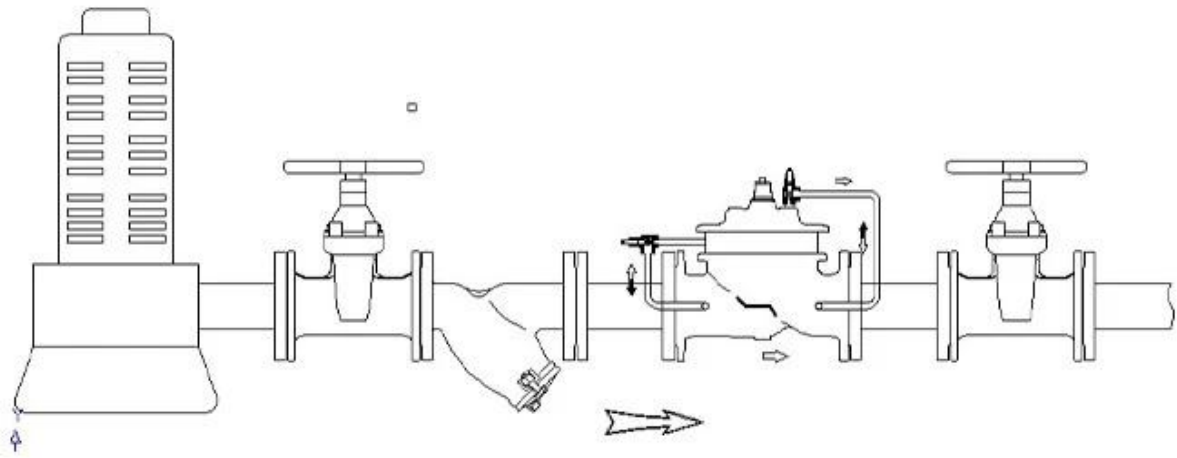

745X
 ;
 ;
 ;
 ;



I 工厂

II 工厂

III 工厂

iv 工厂

v 工厂 GB 工厂 TUV CE ISO 9001 ADWO-2000 TS PED WRC WRA KTW API 6D API609

VI 工厂 工厂/工厂/工厂



Exhibition Photos



