




RKsfluid®

A key Valve in Flow Control



Butterfly Valve



Ball Valve



Gate Valve



Globe Valve



Check Valve



Pipe Fittings

DESIGN FEATURES

DURABLE

- 1 piece non-welded PFA molded DSS Disc stem
- Precision casting WCB/CF8M Bodies

TRIPLE SEAL



- Triple Seal: Spring loaded Mechanical seal, Radial Lip Seal, FPM
- China ONLY ONE Manufacturer 400Mpa Isostatic pressing PTFE seat, consistent density

ANTI-CORROSION

- Material: Epoxy powder: AkzoNobel, Earth Best!
- Coating Thickness: 200-250μm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment

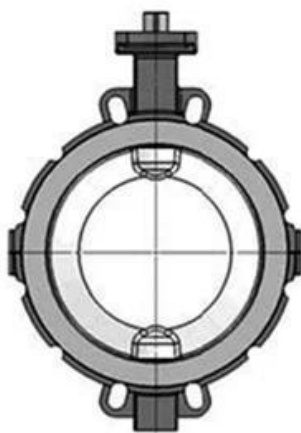

APPLICATION SCENARIO



Industrial water application



Nuclear plant



Petroleum



Steel



Wastewater treatment



Acid-base



Food



Irrigation



Our Factory



Company Advantages

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



I 100% High level ex-factory inspection

II 100% CNC precision manufacturing

III 100% High quality imported materials

IV 2 years quality assurance, repair and replacement

V 100% GB 150, ASME, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC, WRAS, KTW, API 6D, API 609

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

□ □ □ □ □ □ □ □ □ □

```

#####
RKSfluid#####

```

1111111111

RKSfluid

□ □ □ □ □ □ □

□□□□□□2□5□□□□□□□□□□□□□□□□

□ □ □ □ □

□□□□□□1pc□

□ □ □ □ □ □ □ □ □

□□□□□□100□□□□□□2□□□□□□□□□□□□

TUV API WRAS CE ISO

□□□□DIN□ASME□BS EN□JIS□API□AWWA□

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

RKSfluid2070