




RKsfluid®

A key Valve in Flow Control

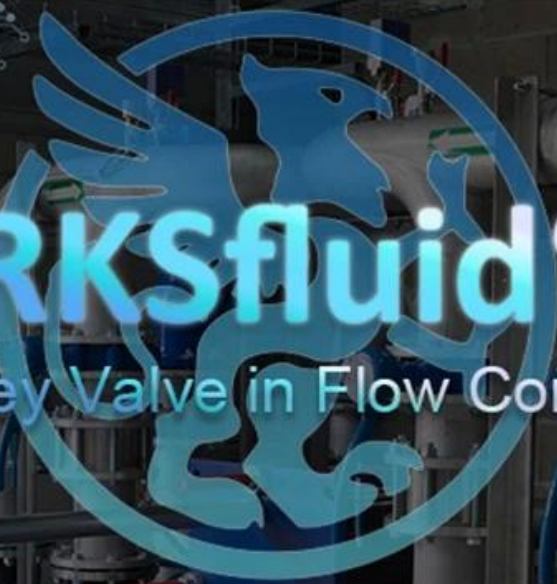

Butterfly Valve



Ball Valve



Gate Valve



Globe Valve



Check Valve



Pipe Fittings

DESIGN FEATURES

VERSATILE & RANGE

- Up to **27mm** of tolerance, **DN40 ~ DN300** stock reduction
- Allows angular deflection of **+/-5°**
- Covering most common pipe materials



DI
Ductile Iron

CI
Cast Iron

PVC
Poly Vinyl Chloride

STL
Steel

GRP
Glass fibre reinforced plastic

AC
Fibre Cement

USER FRIENDLY

- **Economical** and **applicable**
- **Easy Operation**

OPTIMAL SEALING

- **Unique gasket** with circumferential ribs sealing on corroded, scored or pitted pipes

DURABLE

- **Anti-corrosion**
- Thickness: Epoxy powder coating of **200-250µm**
- Temperature : Spraying temperature over **200 °C**. Doesn't fade, even wipe with **diethyl ether**

MATERIAL

- Epoxy powder:  , Earth Best!
- Nuts: **DACROMET®** or **GEOMET®** , Earth Best!
- Cast iron: **EN-GJS-500-7** , nodularity over **95%**!



APPLICATION SCENARIO



Industrial water application



Hydroelectric generation



Sewage treatment



Water treatment



Water supply and drainage



Water transport



Pipe network in house



Irrigation



Our Factory



Company Advantages

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



I 100% High level ex-factory inspection

II CNC precision processing

III 21 years of professional experience

IV 2 years quality assurance, repair and replacement

V GB, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC, WRAS, KTW, API 6D, API 609

2~5

MOQ

1pc

1002

TUV API WRAS CE ISO

DIN ASME BS EN JIS API AWWA

RKSfluid 2070