

CAV 3F2F - 3F2F (3F2F)

3F2F

3F2F

3F2F

3F2F


PP2F

3F2F

3F2F

3F2F **EN-GJS500-7** PE/PP NBR SUS304



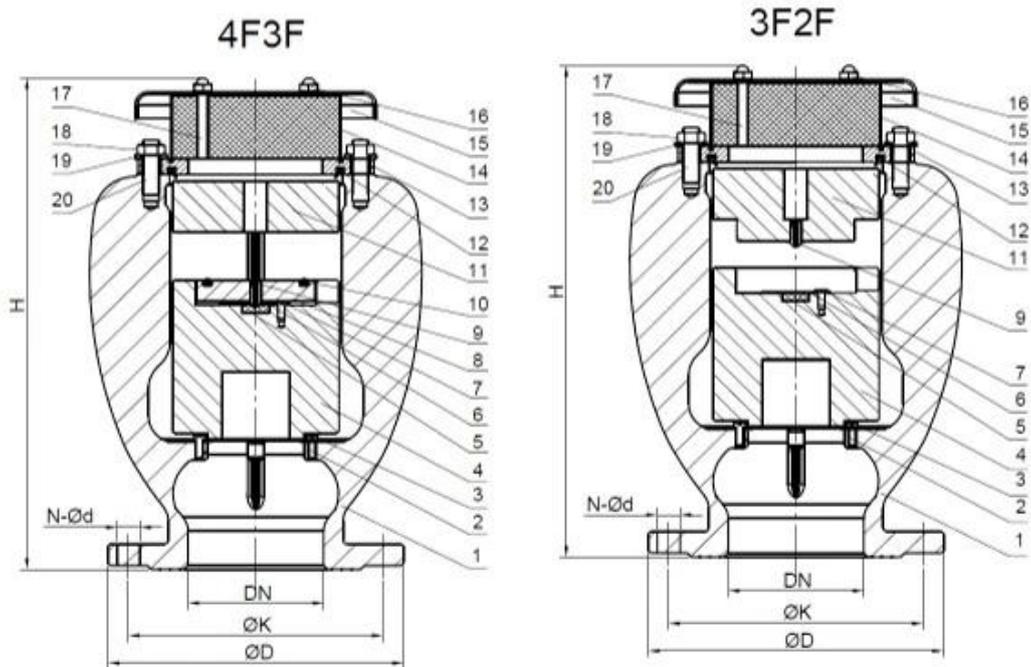

□□□□

CAV □□-□□ (4F3F)

CAV □□□ - □□□ (3F2F)

DN	ØD(mm)				ØK(mm)				N-Ød(mm)				Full Bore		Reduced Bore	
	PN10	PN16	PN25	PN40	PN10	PN16	PN25	PN40	PN10	PN16	PN25	PN40	H(mm)	Weight (kg)	H(mm)	Weight (kg)
50	165				Ø125				4-Ø19				220	14.5	-	-
80	200				Ø160				8-Ø19				300	26	220	15.5
100	220		235		Ø180		Ø190		8-Ø19		8-Ø23		370	34	300	28
150	285		300		Ø240		Ø250		8-Ø23		8-Ø28		520	70	370	39
200	340		360	375	Ø295		Ø310	Ø320	8-Ø23	12-Ø23	12-Ø28	12-Ø31	650	129	520	76
250	395	405	425	450	Ø350	Ø355	Ø370	Ø385	12-Ø23	12-Ø28	12-Ø31	12-Ø34	800	185	650	139
300	445	460	485	515	Ø400	Ø410	Ø430	Ø450	12-Ø23	12-Ø28	16-Ø31	16-Ø34	980	286	800	205

COMPANY INFORMATION



RKSfluid 於1997年創立，專注於提供高品質的工業液壓系統。我們擁有先進的CNC加工設備，能夠生產各種複雜的液壓元件。我們的產品符合GB標準，並通過了ISO9001、TS、API、TUV CE、ADWO-2000等認證。RKSfluid 致力於為客戶提供專業的技術支持和優質的服務。我們擁有完善的质量管理体系，確保每一批產品都符合客戶的要求。我們的工廠位於交通便利的地區，方便客戶來廠參觀和洽談。RKSfluid 是您的液壓系統專家。

V TUV CE ISO 9001 ADWO-2000 TS PED WRC WRAS KTW API 6D API609
/ /



COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Delivery



Payment



□□□□

□: □□□□□□□□□□□□□□□□

□□□□”□□□□□□□□□□□□□□□□

□: □□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□ RKSfluid □□□□□□□□□□□□□□□□□□□□□□□□□□□□

☐: □□□□□□□□□□

☐☐ RKSfluid □□□□□□□□□□□□□□□□

□□□□□□

☐☐ □□□□ 2~5 □□□□□□□□□□□□□□□□

☐: □□□□□

☐: □□□□ 1 □□

☐: □□□□□□□□

☐: □□□ 100% □□□□□2 □□□□□□□□□□□□□□

□□□□ TUV□API□WRAS□CE□ISO □□□

□□□□ DIN□ASME□BS EN□JIS□API□AWWA□

☐: □□□□□□□□□□□□□□□□

☐☐ RKSfluid □□27□□□□70□□□□□□□□□□□□□□□□□□□□