


DESIGN FEATURES



- 1.Elastic stainless steel sealing ring,"0"leakage
- 2.Fireproof structural design,blow-out proof stems
- 3.Auto welding plasma powder surfacing valve seat
- 4.Hollow design, reduces flow resistance
- 5.Interchangeable DSS entity seal / multiple-piece
- 6.stainless and graphite seal
- 7.ISO5211 Mounting platform,simple connection

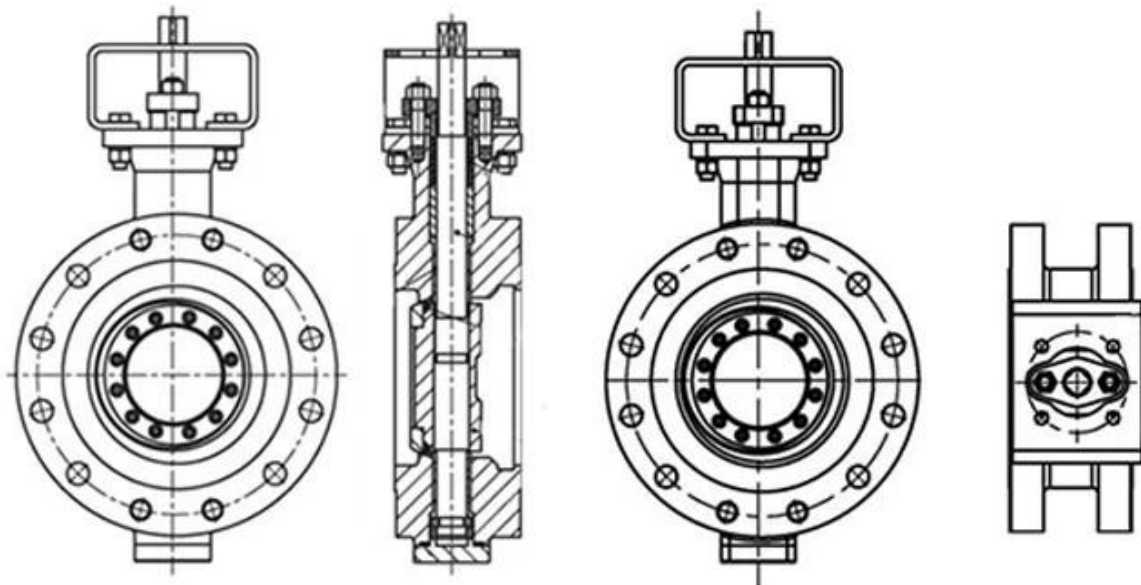

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport





1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

II □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

III □

□ □

V TUV CE ISO 9001 ADWO-2000 TS PED WRC WRAS KTW API 6D API609

[illegible]

COMPANY QUALIFICATION



COMPANY EXHIBITION



□□□□

□: □□□□□□□□□□□□□□
 □□□□”□□□□□□□□□□□□□□

□: □□□□□□□□□□□□□□
 □□□□□□□□□□□□□□ RKSfluid □□□□□□□□□□□□□□□□□□

□: □□□□□□□□□□
 □□□ RKSfluid □□□□□□□□□□□□□□□□□□

□□□□□□
 □□□ □□□□□ 2~5 □□□□□□□□□□□□□□□□□□

□: □□□□□□
 □: □□□□ 1 □□

□: □□□□□□□□□□
 □: □□□ 100% □□□□□2 □□□□□□□□□□□□□□
 □□□□□ TUV□API□WRAS□CE□ISO □□□□
 □□□□□ DIN□ASME□BS EN□JIS□API□AWWA□

□: □□□□□□□□□□□□□□□□□□
 □□□ RKSfluid □□20□□□□□70□□□□□□□□□□□□□□□□□□□□□□□□□□