



DESIGN FEATURES

VERSATILE & RANGE

- Up to 28mm of tolerance, **DN40 ~ DN450** stock reduction
- Allows angular deflection of **+/-3°** per gasket
- Covering most common pipe materials



OPTIMAL SEALING


- Unique gasket with circumferential ribs sealing on corroded, scored or pitted pipes

DURABLE

- ANTI-CORROSION
- Thickness: **Epoxy powder** coating of **200-250µm**
- Temperature : Spraying temperature over **200°C**
Doesn't fade, even wipe with **diethyl ether**

MATERIAL

- Epoxy powder: **AkzoNobel**, Earth Best!
- Nuts: **DACROMET®** or **GEOMET®**, Earth Best!
- Cast iron: **EN-GJS-500-7**, nodularity over **95%**!
- Flange Adaptors: for most common flange standards. **PN10/16/ANSI150** drilled

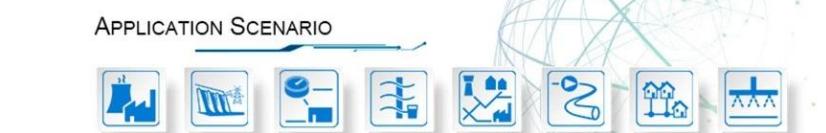

APPLICATION SCENARIO



Our Factory



Company Advantages

01 21 years of professional experience

03 Independent research and development team
28 top senior professional researchers

05 100% high level ex-factory inspection

07 2 years quality assurance, repair and replacement

02 4 factories

04 2 professional testing centers

06 High quality imported materials



I. 工厂概况

II. CNC加工中心及生产流水线

III. 生产车间

IV. 品质控制

V. 质量管理体系：GB/T19001-2008/TUV CE/ISO 9001/ADWO-2000/TS/PED/WRC WRAS/KTW/API 6D/API609

VI. 展会及客户案例

Exhibition Photos



Our Certificates



ISO9001

ISO9001 ISO9002 ISO9003
ISO9004 ISO9005 ISO9006

ISO9001 ISO9002 ISO9003
ISO9004 ISO9005 ISO9006 RKSfluid ISO9001 ISO9002 ISO9003

ISO9001 ISO9002 ISO9003
RKSfluid ISO9001 ISO9002 ISO9003

ISO9001 ISO9002 ISO9003
ISO9004 ISO9005 ISO9006 2~5 years

MOQ
1pc

ISO9001 ISO9002 ISO9003
ISO9004 ISO9005 ISO9006
TUV API WRAS CE ISO
DIN ASME BS EN JIS API AWWA

ISO9001 ISO9002 ISO9003

©RKSfluid©2009-70