[illegible]

[illegible]

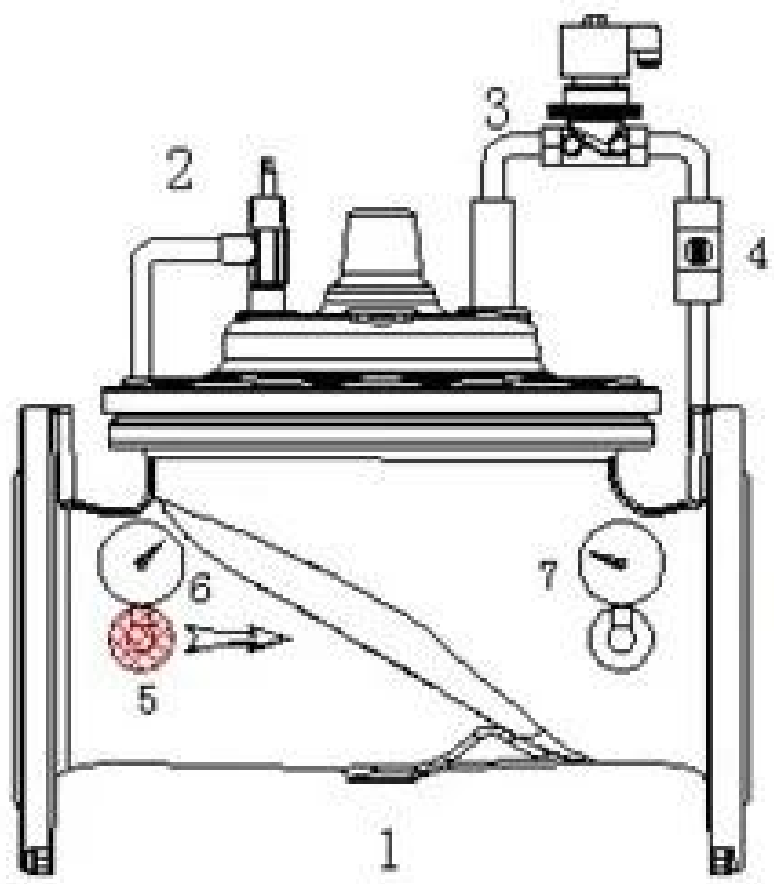

1.[illegible]
2.[illegible]
3.[illegible]
4.[illegible]
5.[illegible]
6.*[illegible]
7.*[illegible]

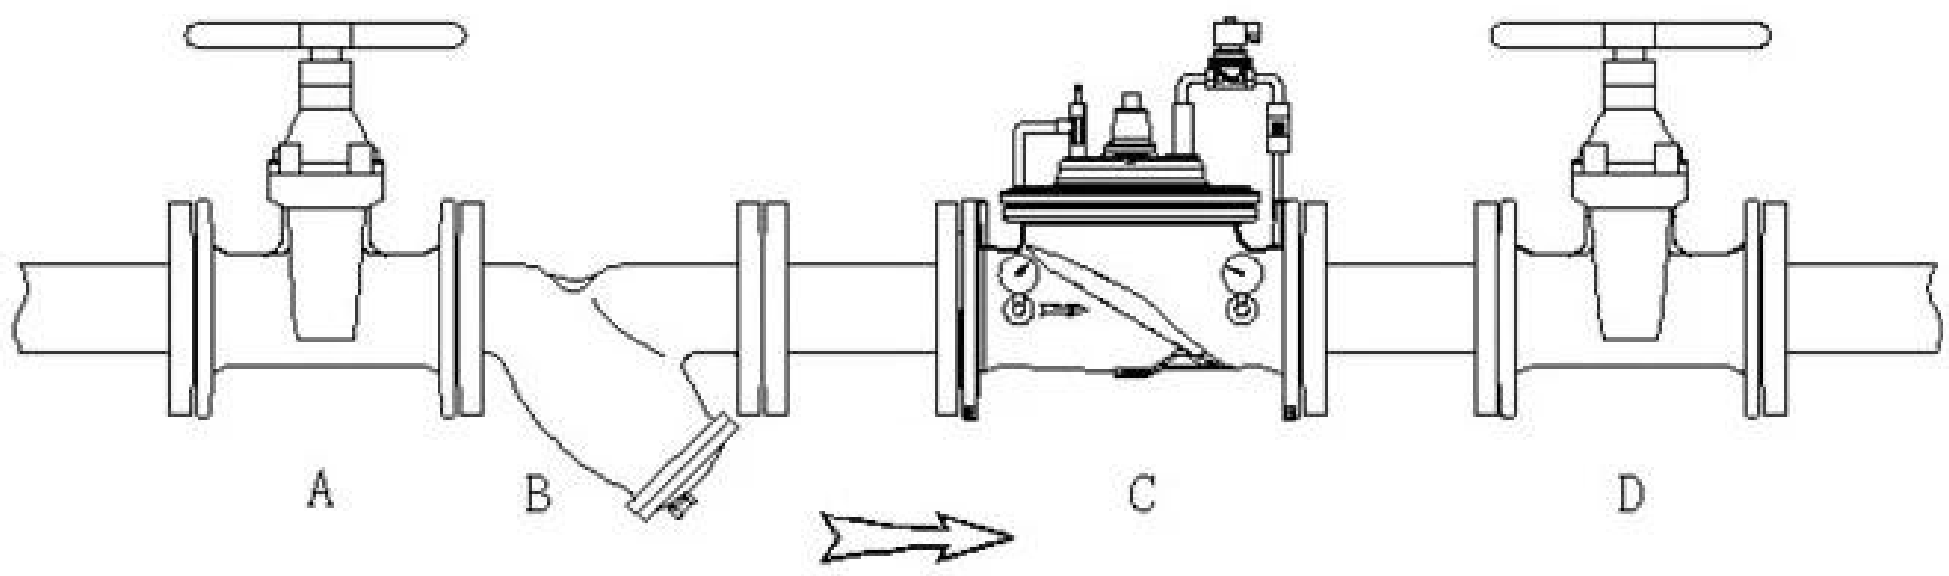

A. Inlet isolation valve B. Strainer C. Solenoid control valve D. Outlet isolation valve

[illegible]

1.[illegible]
2.[illegible]
[illegible]24[illegible]
[illegible]24[illegible]

COMPANY INFORMATION

I[illegible]
Ⅱ [illegible]
Ⅲ[illegible]
[illegible]
V [illegible]TUV CE[illegible]ISO 9001[illegible]ADWO-2000[illegible]TS[illegible]PED[illegible]WRC WRAS[illegible]KTW[illegible]API 6D[illegible]API609[illegible]
[illegible] [illegible]/[illegible]/[illegible]

01 21 years of professional experience

02 4 factories

03 Independent research and development team
28 top senior professional researchers

04 2 professional testing centers

05 100% high level ex-factory inspection

06 High quality imported materials

07 2 years quality assurance, repair and replacement

COMPANY QUALIFICATION

COMPANY EXHIBITION

□□□□

□: □□□□□□□□□□□□□□□□□□□
□□□□”□□□□□□□□□□□□□□□□□□□

□: □□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□ RKSfluid □□□□□□□□□□□□□□□□□□□□□□□□□□

□: □□□□□□□□□□□□
A□ RKSfluid □□□□□□□□□□□□□□□□□□□□

□□□□□□□
A□ □□□□□□ 2~5 □□□□□□□□□□□□□□□□□□□□

□: □□□□□
□: □□□□ 1 □□

□: □□□□□□□□□
□: □□□ 100% □□□□□□2 □□□□□□□□□□□□□□□□
□□□□□ TUV□API□WRAS□CE□ISO □□□
□□□□ DIN□ASME□BS EN□JIS□API□AWWA□

□: □□□□□□□□□□□□□□□□□□

A□ RKSfluid □□20□□□□70□□□□□□□□□□□□□□□□□□□□□□□□