

DESIGN FEATURES

HIGHLY CUSTOMIZABLE

- According to **customer requirements**

OPTIMAL SEALING

- AWWA-C219 **absolutely leakproof**
- Internal ebonite rubber lining

CLASSIC & STURDY DESIGN

- Longitudinal adjustment of **+/- 25mm**
- **Super large** Dia & Even pressures up to **100 bar**
- **Cost-effective**, alternative for duplex stainless steel on desalination application

APPLICATION

- Perfect solution for all standard and non-standard applications in challenging famous projects worldwide
- Desalination, water pipes and **various application**


DURABLE

- ANTI-CORROSION
- Thickness: **Epoxy powder** coating of **150-200µm**
- Temperature : Spraying temperature over **200 °C**. Doesn't fade, even wipe with **diethyl ether**

MATERIAL

- Epoxy powder:  , Earth Best!
- WRAS, KTW-W270, ACS approved materials
- Cast iron: nodularity over **95%!**
- Bolts, nuts & washers: Hot Dip Galvanized or Stainless Steel **AISI316-A4**



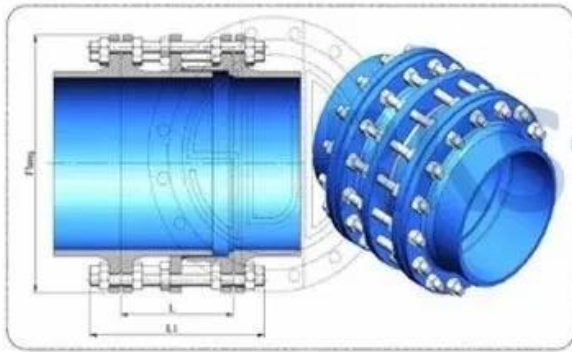

APPLICATION SCENARIO



Industrial water application



Hydroelectric generation



Sewage treatment



Water treatment



Water supply and drainage



Water transport



Pipe network in house



Irrigation



Our Factory



Company Advantages

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



i 工厂占地面积约 10000 平方米

ii 工厂 CNC 加工设备约 50 余台

iii 工厂拥有专业的研发团队

iv 工厂拥有完善的质量管理体系

v 工厂通过 GB/T 19001-2016/ISO 9001:2015、ADWO-2000、TS 16949、PED、WRC、WRAS、KTW、KTW、API 6D、API 609 等认证

vi 工厂拥有完善的质量管理体系 / 工厂 / 工厂

Exhibition Photos



Our Certificates



□□□□

□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□

□□□□□□□□□□□□
□□□□□□□□□□ RKSfluid □□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□
□□□ RKSfluid □□□□□□□□□□□□□□□□

□□□□□□□□
□□□□□□□□25□□□□□□□□□□□□□□□□□□□□

□□□□
□□□□□□1 pc□

□□□□□□□□□□
□□□□□100□□□□□□□2□□□□□□□□□□□□□□
□□□□□□□TUV□API□WRAS□CE□ISO□□□□
□□□□□DIN□ASME□BS EN□JIS□API□AWWA□

□□□□□□□□□□□□□□□□
□□□ RKSfluid □□20□□□□□□□□□70□□□□□□□□□□□□□□□□□□□□□□□□