



RKSfluid®

A key Valve in Flow Control



Butterfly Valve



Ball Valve



Gate Valve



Globe Valve



Check Valve



Pipe Fittings

DESIGN FEATURES

DURABLE

- 1 piece non-welded PFA molded DSS Disc stem
- Precision casting WCB/CF8M Bodies

TRIPLE SEAL


- Triple Seal: Spring loaded Mechanical seal, Radial Lip Seal, FPM
- China ONLY ONE Manufacturer 400Mpa Isostatic pressing PTFE seat, consistent density

ANTI-CORROSION

- Material: Epoxy powder: AkzoNobel, Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment

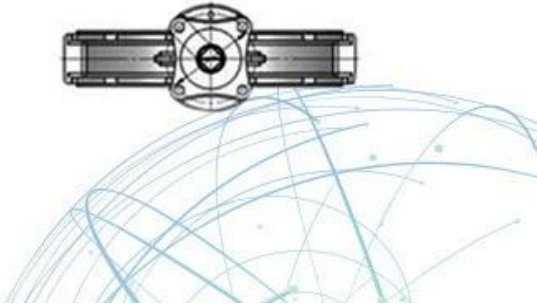

APPLICATION SCENARIO



Industrial water application



Nuclear plant



Petroleum



Steel



Wastewater treatment



Acid-base



Food



Irrigation



Our Factory



Company Advantages



I 工厂拥有先进的生产设备

II 工厂拥有CNC加工中心

III 工厂拥有专业的研发团队

IV 工厂拥有完善的质量管理体系

V 工厂拥有GB、TUV CE、ISO 9001、ADWO-2000、TS、PED、WRC WRAS、KTW、API 6D、API609等认证

工厂拥有完善的质量管理体系/工厂拥有完善的质量管理体系

Exhibition Photos



Our Certificates



□□□□

□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□
□□□□□□□□□□□□ RKSfluid □□□□□□□□□□□□□□□□

□□□□□□□□□□
□□ RKSfluid □□□□□□□□□□□□□□

□□□□□□□
□□□□□□□2~5 □□□□□□□□□□□□□□□□

□□ MOQ
□□□□□□□1pc

□□□□□□□□□□
□□□□□100 □□□□□□2 □□□□□□□□□□□□□□□
□□□□□TUV □API □WRAS □CE □ISO □□□□
□□□□□DIN □ASME □BS EN □JIS □API □AWWA □

□□□□□□□□□□□□□□□□
□□ RKSfluid □□20 □□□□□□70 □□□□□□□□□□□□□□□□□□□□