ППП

- 1. 0000000000
- 3. PTFE _______
- 50000000



DESIGN FEATURES

DURABLE:

- · 1 piece non-welded PFA molded DSS Disc stem
- · Precision casting WCB/CF8M Bodies

TRIPLE SEAL:


- Triple Seal:Spring loaded Mechanical seal,Radial Lip Seal,FPM
- China ONLY ONE Manufacturer 400Mpa Isostatic pressing PTFE seat, consistent density

ANTI-CORROSION:

- · Material: Epoxy powder
- · Coating Thickness:200-250μm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- · 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- · ONLY ONE Manufacturer get CE certification up to DN1800
- · 2 years warranty.15000 times On off test,30000 times Destructive experiment

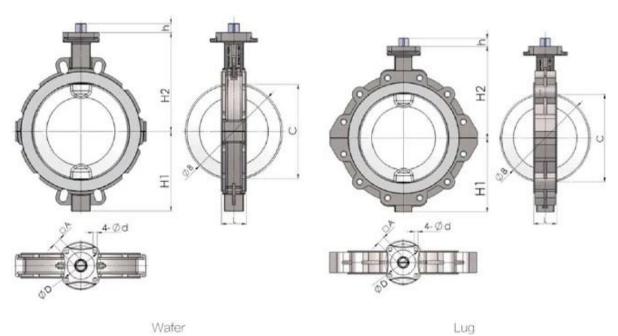

yyard Lug

IMPERIAL DIMENSIONS:Inches										
Size	L	H1	H2	h	Α	В	С	D	d	IS05211
NPS2	1.69	2.20	5.31	0.47	0.43	2.01	1.08	1.97	0.28	F05
NPS2 1/2	1.81	3.35	5.91	0.47	0.43	2.72	1.99	1.97	0.28	F05
NPS3	1.81	3.74	6,30	0.63	0.55	3.27	2.70	2.76	0.35	F07
NPS4	2.05	4.13	7.09	0.63	0.55	4.06	3.50	2.76	0.35	F07
NPS5	2.20	4.92	7.68	0.63	0.55	5.00	4.49	2.76	0.35	F07
NPS6	2.20	5.71	10.04	0.63	0.55	5.98	5.57	2.76	0.35	F07
NPS8	2.36	6.69	9.45	0.83	0.75	7.99	7.64	4.02	0.47	F10
NPS10	2.68	8.07	11.81	0.94	0.87	10.00	9.65	4.92	0.51	F12
NPS12	3.07	9.84	12.20	1.14	1.06	12.01	11.61	4.92	0.51	F12

APPLICATION SCENARIO





















Industrial water application

Sea water desalination

Water treatment

Water supply and drainage

HAVC

Food and drug Water transport

























 ${\tt I\hspace{-.07cm}I} \hspace{-.2cm} = \hspace{-.2cm} -\hspace{-.2cm} -\hspace{-.2cm$























COMPANY EXHIBITION





















 00000 AD 00000 2~5 0000000000000000