



RKSfluid®

A key Valve in Flow Control




Butterfly Valve



Ball Valve



Gate Valve



Globe Valve



Check Valve



Pipe Fittings

DESIGN FEATURES

DURABLE

- 1 piece non-welded PFA molded DSS Disc stem
- Precision casting WCB/CF8M Bodies

TRIPLE SEAL


- Triple Seal: Spring loaded Mechanical seal, Radial Lip Seal, FPM
- China ONLY ONE Manufacturer 400Mpa Isostatic pressing PTFE seat, consistent density

ANTI-CORROSION

- Material: Epoxy powder: AkzoNobel, Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment

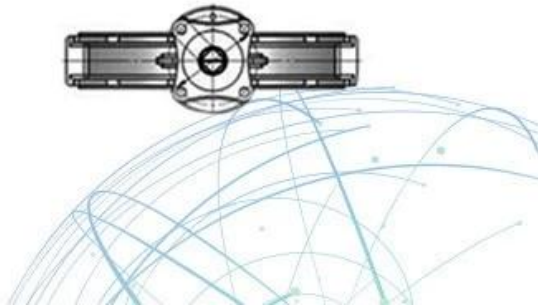

APPLICATION SCENARIO



Industrial water application



Nuclear plant



Petroleum



Steel



Wastewater treatment



Acid-base



Food



Irrigation



Our Factory



Company Advantages



i

ii

iii

iv

v GB TUV CE ISO 9001 ADWO-2000 TS PED WRC WRA KTW API 6D API609

- 00000000000000000000

0000000000000000

- 00000000Hrdraulic00000 RKSfluid00000000000000000000

000000000000

00RKSfluid0000000000000000

00000000

000000002050000000000000000000

00Moq.

A00000001PC

0000000000

- 00000010000000000020000000000000

00000TUV0API0WRA0CE0ISO000

0000DIN0ASME0BS EN0JIS0API0AWWA

0000000000000000

00RKSfluid002000000700000000000000000000000000