




- Better sealing effect, prevent leakage
- Easier replace the filter bag, lower operating cost
- Adjustable installation height to meet specific application occasions
- Large effective filtration area and higher filtration efficiency
- Longer filter bag service life
- Reasonable structure, more stable and reliable filtration
- China GB-150, International ASME, CE Pressure Standards



- Filter different chemical **acid** and **alkali** liquids
- No seam, no dead angle, precise specification
- Smooth surface, no groove, no dead angle, easy to clean
- Can withstand **high temperature** and **high pressure**
- High quality, high efficiency, economical & practical

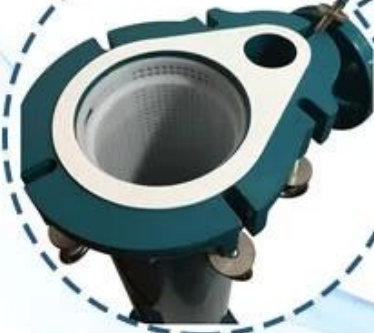

- Suitable for high capacity & large flow filtration
- Provided 3 ~ 24 bags design structure
- Equipped with standard size flange
- Flow from 120 to 960 cubic/hours
- Excellent welding quality, safe and reliable

Our Factory



Company Advantages

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



1. 100% high level ex-factory inspection
2. 21 years of professional experience
3. API, AWWA, ASME, BS, EN, DIN, JIS, TUV, CE, ISO9001, TS, OHSAS, WRAS
4. 2 years quality assurance, repair and replacement

Exhibition Photos



Our Certificates



□□□□
 □□1□□□□□□□□
 A1□□□□□□□□□□□□□□□□□□□□

Q2□□□□□□□□□□
 A2□□□□□□5-10□□□□□□□□□□□□□□□□15-90□□

□□3□□□□□□□□
 A3□T / T 30□□□□□□□□□□□□□□□□□□□□

□□4□□□□□□□□□□□□□□□□□□
 A4□□□□□□□1□□□□□□□□□□□□□□□□□□□□□□

Q5□□□□□□□□□□□□□□□□□□□□
 A5□□□□□□□100□□□□□□□□□□□□□□□□

Q6□□□□□□□□□□□□□□□□□□□□
 A6□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□7□□□□□□□□□□□□□□□□□□
 A7□□□1□□□□□□□□□□□□□□□□□□□□□□□□