

DESIGN FEATURES




Features



- Use AkzoNobel material.
- Super Anti-corrosion
- Epoxy powder coating 200-250um,
- Baking varnish over 200°C,

NO.		
1	Body	GGG50
2	Dise	GGG40+EPDM
3	Wedge nut	C48600
4	Stem	SS431
5	Bonnet	GT450-10
6	Gasket	EPDM
7	Y-ring	EPDM85-90
8	Fix ring	CuZn21Si3/C69300
9	Thrust bearing	C69300
10	Seal ring	EPDM70
11	O ring	NBR
12	Retainer ring	POM
13	Bushing ring	POM
14	Gland	SS431
15	Dustproof ring	EPDM85
16	Dise core	GGG40
17	Bolt	SS316

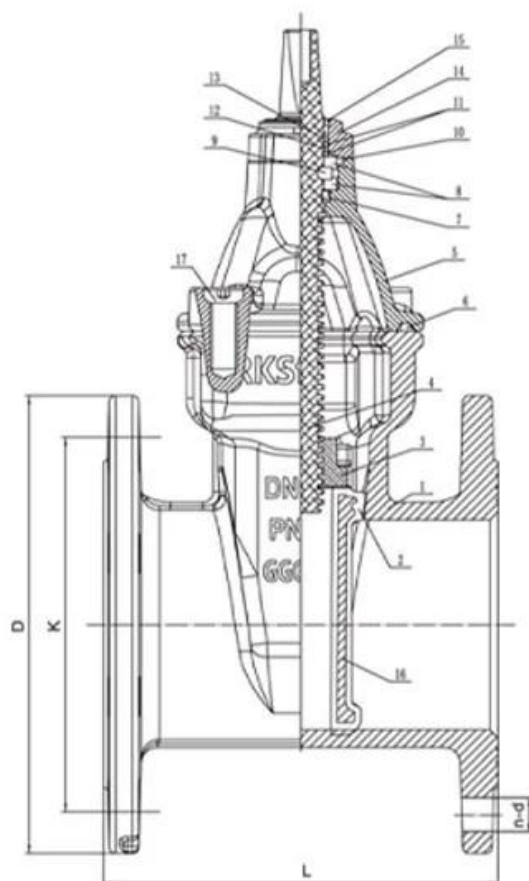



Free wedge nut, **reduces the stem bending forces** and at the same time enables it to be easily replaced.



The more compact new cap, reduces the water retention areas in order to **reduce the risk of bacterial growth**.



One piece stainless steel stem in for **better resistance to axial load and to with stand higher operating torques**.



Three locking tab for bayonet system prevents self-dismantling.



Dust guard integrating three O-ring shape, **prohibiting the introduction of foreign** bodies at the stem.



Male guiding system with composite sliding skate reduces the wear of the wedge against the body, allowing a smooth functionality and a longer life time of the valve.



Triple seal at the operating stem to ensure tightness with the test of time (2500 cycles).



New male composite sliding skate technology ensuring a low operating torque even under high differential pressure and preventing damage or corrosion generated by the friction.

RELATED PRODUCTS



APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



I Área comercial: Productos para el control de fluidos, productos tecnológicos y de protección ambiental.

II Centros de procesamiento CNC avanzados, celdas de procesos profesionales, equipos de soldadura de gran rango, líneas de ensamblaje automático y recubrimiento.

III Unidad de referencia estándar de China, para participar en el desarrollo de los estándares del sector de las válvulas relevantes.

IV Hemos establecido un centro de investigación y desarrollo en Houston, Texas, Estados Unidos.

V Estándar del producto: GB, estándar alemán, estándares estadounidenses, TUV CE, ISO 9001, ADWO-200, TS, PED, WRC WRAS, KTW, API 6D, API609.

VI Producción principal: válvula de mariposa, válvula de bola, válvula de compuerta, válvula de reiteración, válvulas globales, accesorios de tubos, actuador manual / neumático / eléctrico, piezas de válvula.

01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Preguntas más frecuentes

P: Si necesito cotización, ¿qué información necesitamos?

A: Materiales de válvulas, temperatura, presión, vehículo, sistema de aplicación.

P: ¿Puede proporcionar actuadores, qué tiene?

A: válvulas neumáticas, eléctricas, hidráulicas, solenoides. Los actores RKSfluid adoptan la tecnología estadounidense. Necesitas, solo decírnos.

P: ¿Cuál es su capacidad de producción?

R: RKSfluid tiene cuatro plantas que pueden proporcionar los productos que necesita.

D: Tiempo de entrega de producción

R: Los productos normales tienen acciones en 2 ~ 5 días hábiles. Base personalizada en su necesidad.

D: MOQ

A: 1 PC para todos los productos.

P: ¿Y la garantía de calidad?

R: Pruebas de calidad del 100% antes de la entrega, garantía de 2 años. Asegúrese de su sistema de seguridad.

Obtuvimos TUV, API, WRAS, CE, Certificación ISO.

Standard cumple con DIN, ASME, BS EN, JIS, API, AWWA.

P: ¿Cómo podría proporcionar un servicio de calidad a nuestros clientes?

R: RKSfluid posee 20 años de experiencias y más de 70 ingenieros de I + D brindan soporte técnico, selección de modelos e indicaciones de instalación para usted.