DESIGN FEATURES

Features

- Use AkzoNobel material.
- Super Anti-corrosion
- Epoxy powder coating 200-250um,
- Baking varnish over 200℃,

NO.		
1	Body	GGG50
2	Dise	GGG40+EPDM
3	Wedge nut	C48600
4	Stem	SS431
5	Bonnet	GT450-10
6	Gasket	EPDM
7	Y-ring	EPDM85-90
8	Fix ring	CuZn21Si3/C69300
9	Thrust bearing	C69300
10	Seal ring	EPDM70
11	O ring	NBR
12	Retainer ring	POM
13	Bushing ring	POM
14	Gland	SS431
15	Dustproof ring	EPDM85
16	Dise core	GGG40
17	Bolt	SS316

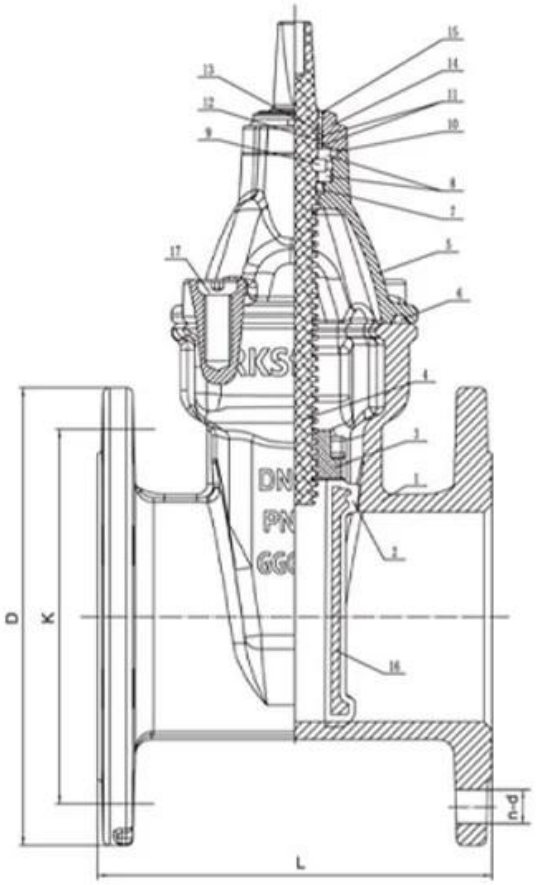

Free wedge nut, **reduces the stem bending forces** and at the same time enables it to be easily replaced.

The more compact new cap, reduces the water retention areas in order **to reduce the risk of bacterial growth**.

One piece stainless steel stem in for **better resistance to axial load and to with stand higher operating torques**.

Three locking tab for bayonet system prevents self-dismantling.

Dust guard integrating three O-ring shape, **prohibiting the introduction of foreign** bodies at the stem.

Male guiding system with composite sliding skate reduces the wear of the wedge against the body, allowing a smooth functionality and a longer life time of the valve.

Triple seal at the operating stem to ensure tightness with the test of time (2500 cycles).

New male composite sliding skate technology ensuring a low operating torque even under high differential pressure and preventing damage or corrosion generated by the friction.

RELATED PRODUCTS

APPLICATION SCENARIO

Industrial water application | Power plant | Sea water desalination | Water treatment | Water supply and drainage | HAVC | Food and drug | Water transport

COMPANY FACTORY

COMPANY INFORMATION

I Area commerciale: prodotti per il controllo dei fluidi, prodotti tecnologici e protezione ambientale.

Ⅱ Centri di elaborazione CNC avanzati, celle di processo professionale, apparecchiature di saldatura a grandezza grande, assemblaggio automatico e linee di rivestimento.

Ⅲ Unità di riferimento standard in Cina, per partecipare allo sviluppo degli standard del pertinente settore delle valvole.

IV Abbiamo istituito un centro di ricerca e sviluppo a Houston, in Texas, Stati Uniti.

V Standard del prodotto: GB, standard tedesco, standard americani, dieci CE, ISO 9001, ADWO-200, TS, PED, WRC WRAS, KTW, API 6D, API609.

VI Produzione principale: valvola a farfalla, valvola a sfera, valvola del cancello, valvola di ripetizione, valvole globali, accessori per tubi, attuatore manuale / pneumatico / elettrico, parti della valvola.

01
21 years of professional experience
02
4 factories
03
Independent research and development team
28 top senior professional researchers
04
2 professional testing centers
05
100% high level ex-factory inspection
06
High quality imported materials
07
2 years quality assurance, repair and replacement

COMPANY QUALIFICATION

COMPANY EXHIBITION

Domande frequenti

D: Se ho bisogno di un prezzo, quali informazioni abbiamo bisogno?
A: Materiali della valvola, temperatura, pressione, veicolo, sistema di applicazione.

D: Puoi fornire attuatori, cosa hai?
A: valvole pneumatiche, elettriche, hrdrauliche, solenoidi. Gli attori RKSfluid adottano la tecnologia americana. Hai bisogno, dicci.

D: Qual è la tua capacità produttiva?
A: RKSfluid ha quattro piante in grado di fornire i prodotti di cui hai bisogno.

D: Tempo di consegna della produzione
A: I prodotti normali hanno azioni in 2 ~ 5 giorni lavorativi. Base personalizzata bisognosa.

D: Moq
A: 1 PC per tutti i prodotti.

D: E la garanzia di qualità?
A: Test di qualità al 100% prima della consegna, garanzia di 2 anni. Assicurati il tuo sistema di sicurezza.
Abbiamo ottenuto la certificazione TUV, API, WRAS, CE, ISO.
Standard incontra Din, Asme, BS IN, JIS, API, AWWA.

D: Come potresti fornire un servizio di qualità ai nostri clienti?
A: RKSfluid ha 20 anni di esperienze e più di 70 ingegneri di ricerca e sviluppo forniscono supporto tecnico, selezione di modelli e indicazioni di installazione per te.