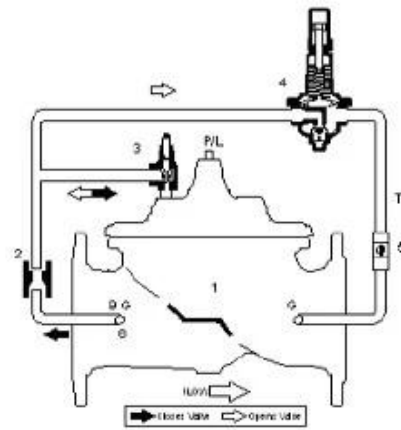


[illegible]

111

[illegible]

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

□□□□□□□□□□□□□□□□

-1000000

-5□□□□□□□□

□□□□□□□□□□CNC□□□□□□□□□□□□

GSK WIS

□□□□□□□□

- 0.5


$$1.1x^{pn+1}$$
$$- \frac{1}{n} \log p = -\frac{1}{n} \log(1.5^n) = -1.5$$

- □□□□□□□□+/- 0.2□□

1000

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

WRAS/KTW/NSF/FDA/ACS

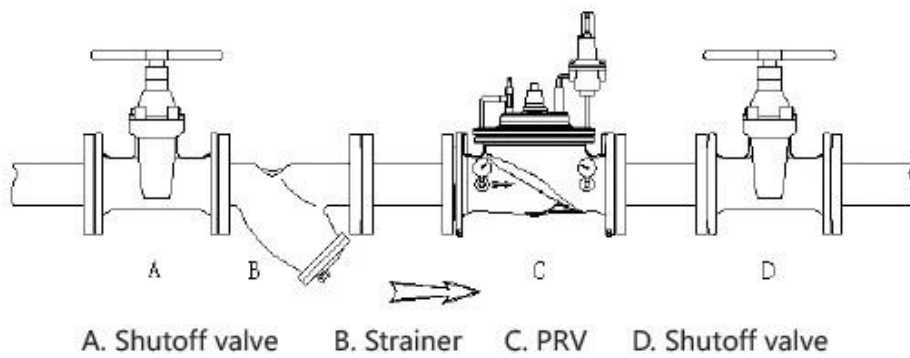

1. 此系列减压阀适用于工业、民用建筑、市政给排水及工业冷却水系统的压力调节。
 2. 减压阀应安装在水平管道上，且阀前应有1.0m以上的直管段，阀后应有0.3m以上的直管段。
 3. 减压阀的进口压力应大于其额定压力，且不超过其额定压力的1.5倍。
 4. 减压阀的出口压力应为其额定压力的0.5~0.7倍，且不超过0.7MPa。
 5. 减压阀应定期进行校验和维护，确保其正常工作。

公称口径	DN40-DN1200
连接形式	法兰
适用温度	0℃~70℃
材质	铸钢/不锈钢/铜合金/铝合金/塑料合金

dn	l	h	H1	dn	l	h	H1
40	230	139	85	250	730	476	205
50	230	139	85	300	850	526	232
65	290	159	95	350	980	585	262
80	310	179	102	400	1100	624	292
100	350	214	112	500	1250	720	360
125	400	278	127	600	1450	835	424
150	480	333	145	800	1850	1110	515
200	600	407	172	1000	2250	1350	630



COMPANY INFORMATION



i

divanced Advanced CNC Machining Center Professional Process Cells

china

cention

v GB American Standard Tuv CE ISO 9001 ADWO-2000 TS PED WRC WRA KTW API 6D API609

VI / /

COMPANY FACTORY



01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06


COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Q

Q

A Hrdraulic RKSfluid USA

Q請問有現貨嗎

A RK fluid 有現貨 4 吋

Q請問有現貨嗎

A 有現貨 2 5 吋

Q Moq

A 1 PC

Q請問有現貨嗎

A 有現貨 100 2 吋

TUV API WRA CE ISO

Standard DIN ASME BS EN JIS API AWWA

Q請問有現貨嗎

A RK fluid 有現貨 20 70 RD