



DESIGN FEATURES

DURABLE

- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%


ANTI-CORROSION

- Material: Epoxy powder:  , Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment



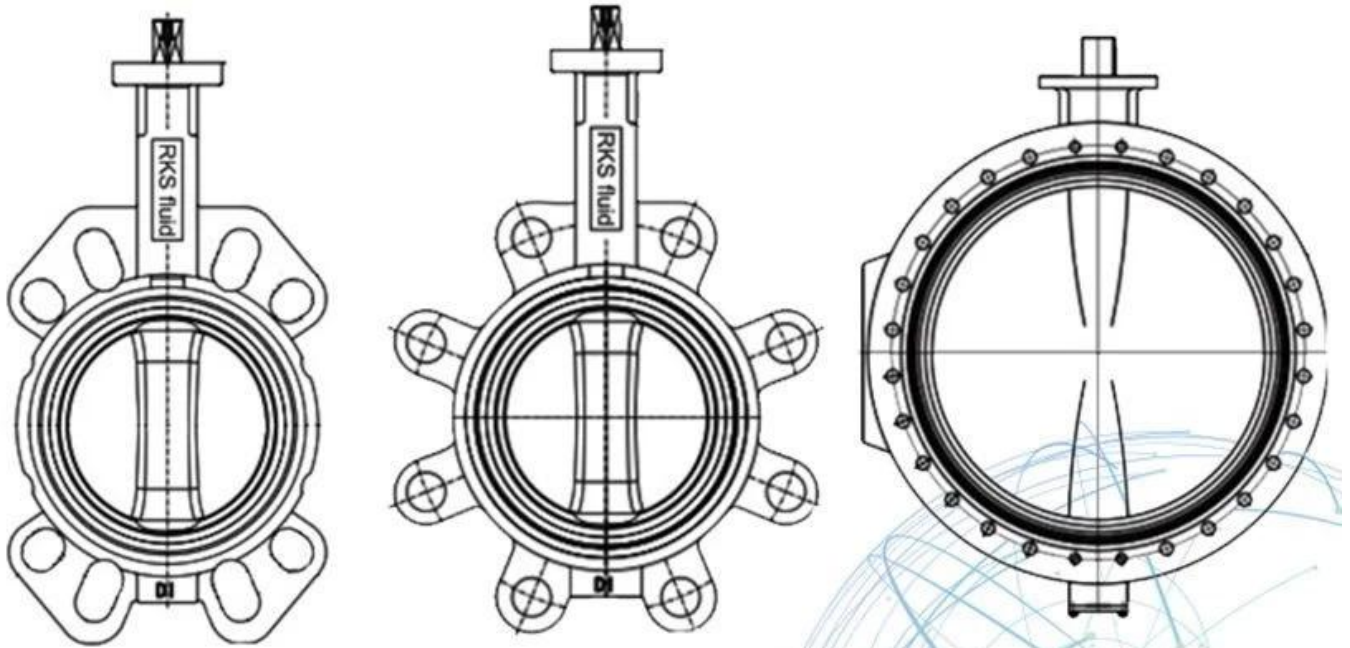

APPLICATION SCENARIO



Industrial water
application



Power plant



Sea water
desalination



Water treatment



Water supply
and drainage



HAVC



Food and drug



Water transport



Our Factory



Company Advantages

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



I 工厂地址：中国广东省佛山市南海区

II 工厂CNC加工中心：拥有多台进口CNC加工中心，可加工各种精密零件。

III 工厂检测设备：配备先进的检测设备，确保产品质量。

IV 工厂质量管理体系：通过ISO 9001:2008质量管理体系认证。

V 工厂产品认证：产品通过GB、TUV CE、ISO 9001、ADWO-2000、TS、PED、WRC WRAS、KTW、API 6D、API609等认证。

VI 工厂产品：主要生产各种工业阀门、管件、法兰等。

Exhibition Photos





Q

A

Q□□□□□□□□□□□□□□□□
A□RKSfluid□□□□□□□□□□□□□□4□□□□□□□□□□□□□□□□

Q□□□□□□□
A□□□□□□□□2□5□□□□□□□□□□□□□□□□□□□□□□

QMOQ
A0000000100

Q□□□□□□□□□□
A□□□□□100□□□□□□2□□□□□□□□□□□□□□□□□□□□□□□□
TUV□API□WRAS□CE□ISO□□□□□□□□□□
DIN□ASME□BS EN□JIS□API□AWWA□□□□□□□□□□

Q

A RKSfluid 20 R&D