



DESIGN FEATURES



This series of butterfly valves are used for industrial pipelines, as bi-directional open and close and regulation devices, the adjustment range is from 40°C-90°C full open. Suitable temperature $\geq 80^{\circ}\text{C}$

Features

- Size range DN100-1200mm
- Standard-ISO/BS/DIN/AWWA/API
- Tests Standard-BS EN 12266-1
- Body-Ductile Iron/Cast Iron/Stainless Steel /WCB
- Body Ring-SS420/SS304/SS316
- Disc Ring-EPDM
- Shaft-SS420/SS431/SS316
- Fusion bonded epoxy coating-Min 300 Microns

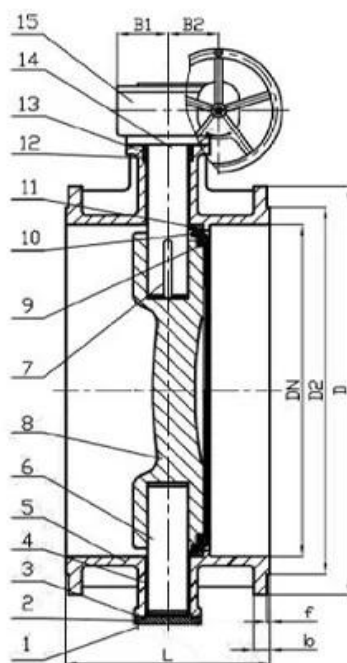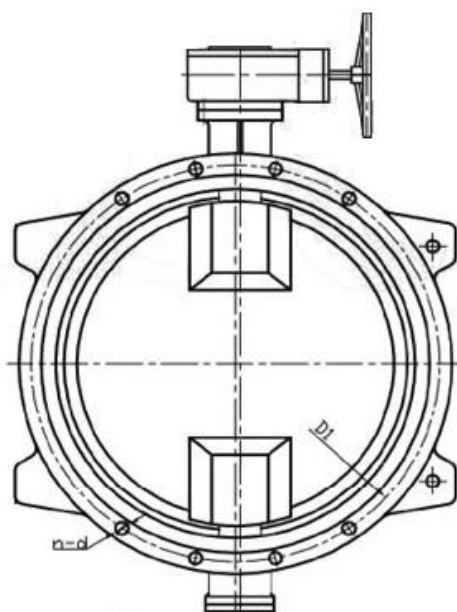

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY INFORMATION



Advanced CNC

Advanced CNC

related

us

include GB, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC, WRA, KTW, API 6D, API 609

VI, / /

COMPANY FACTORY





COMPANY QUALIFICATION





□ □ □ □ □ □ □

Q

A

QUESTION

A hydraulic RKS fluid USA

Q□□□□□□□□□□□□□□□□

A RK Sfluid 4

QUESTION

[illegible]

Q□Moq

A 1PC

Q□□□□□□□□□□

A 100 2

TUV API WRA CE ISO

din asme bs en jis api awwa

Q

A RK Sfluid 20 70 R D