



DESIGN FEATURES

DURABLE

- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%


ANTI-CORROSION

- Material: Epoxy powder:  , Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment



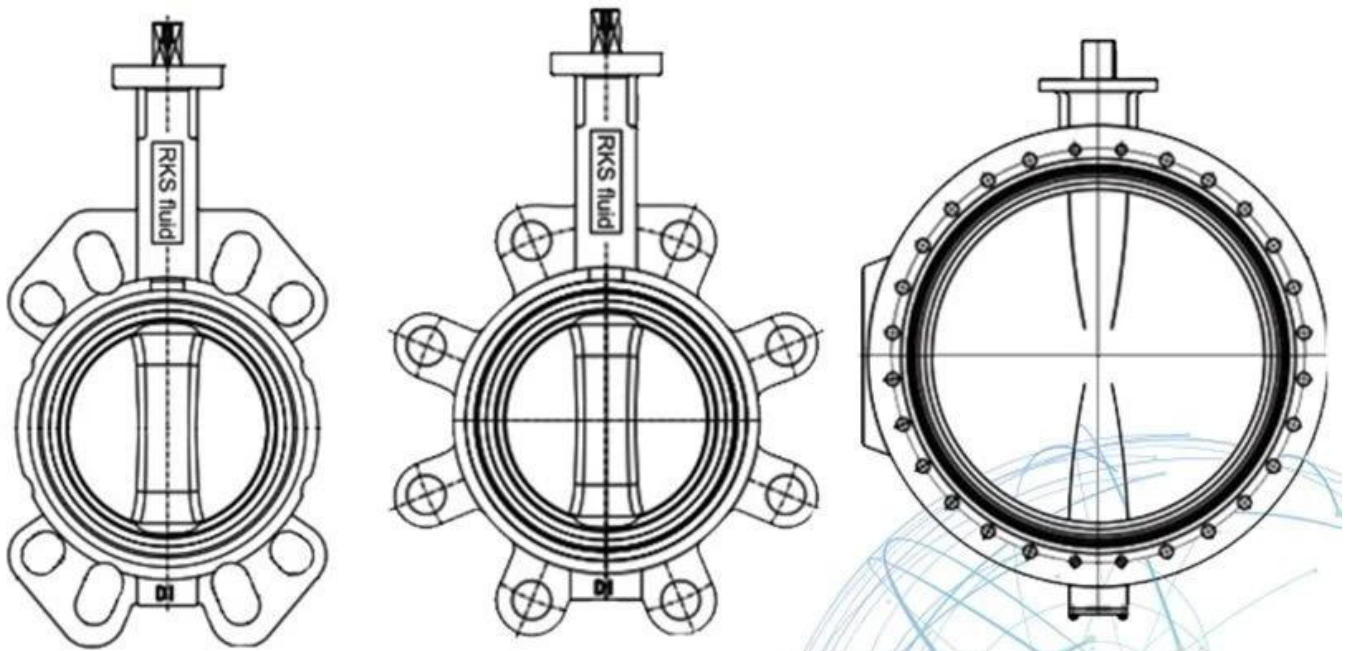

APPLICATION SCENARIO



Industrial water
application



Power plant



Sea water
desalination



Water treatment



Water supply
and drainage



HAVC



Food and drug



Water transport



Our Factory



Company Advantages

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



I 工厂占地面积 100000 平方米

II 拥有 CNC 加工中心 100 余台

III 拥有各种规格的不锈钢储罐

IV 拥有各种规格的不锈钢管道

V 拥有 GB 150、TUV CE、ISO 9001、ADWO-2000、TS、PED、WRC WRAS、KTW、API 6D、API 609 等认证

VI 拥有各种规格的不锈钢阀门、法兰、管件、换热器、反应釜、储罐、管道、泵、压缩机、分离器等

Exhibition Photos





A

A RKSfluid

A_RKSfluid000000000000004000000000

A 25

A□□□□□□□1□□

A 100 2

□□□DIN□ASME□BS EN□JIS□API□AWWA□□□□□□□□

Q

A RKSfluid 20 70