

1. 产品特点

1.1 产品特点

- 产品特点
- 产品特点

1.2 产品特点

1.3 产品特点

1.4 产品特点

- 产品特点
- 产品特点

1.5 产品特点


1.6 产品特点

1.7 产品特点




- Streamlined, minimum noise
- Backflow velocity only 0. 2s, Head loss 0. 1bar with 2m/s
- EPDM/NBR Rubber fully coated disc
- Anti-erosion design. Self-adjusting ball
- Self-cleaning stem, Long time smooth operation


规格	DN50-DN600(NPS2-NPS24)
压力等级	PN10/16/25
温度范围	0°C-80°C
材质	铸钢/不锈钢
密封材料	EPDM/NBR
执行标准	GB/T 12235-2007
法兰标准	EN 558-1
法兰密封面	EN 1092-2

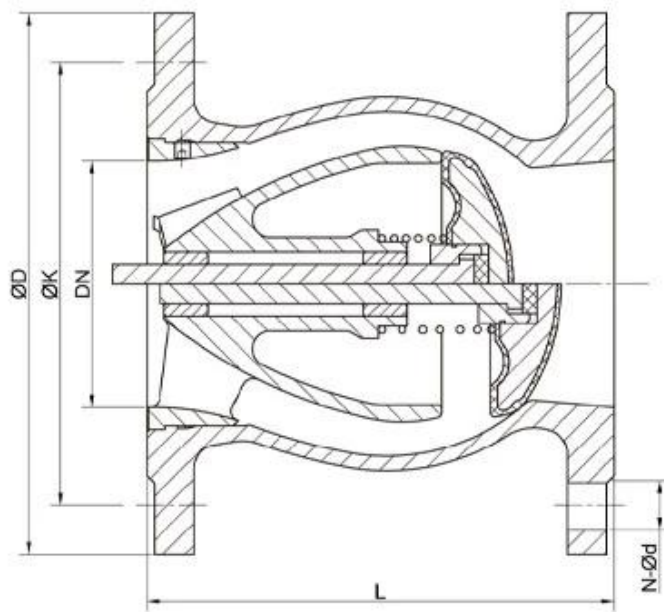

NPS2-NPS14 (DN50-DN350)

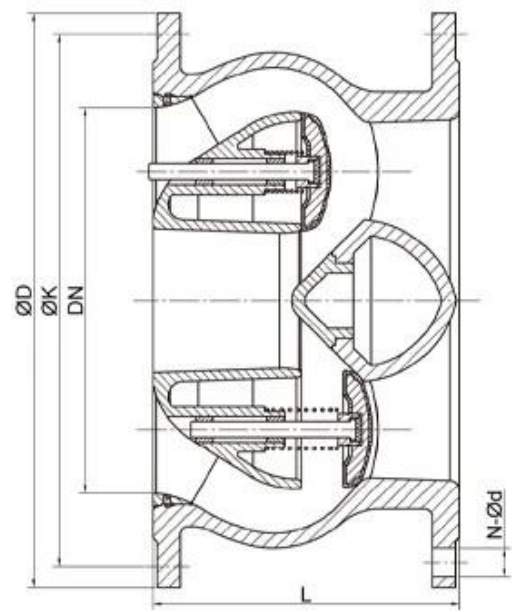

NPS16-NPS24 (DN400-DN600)

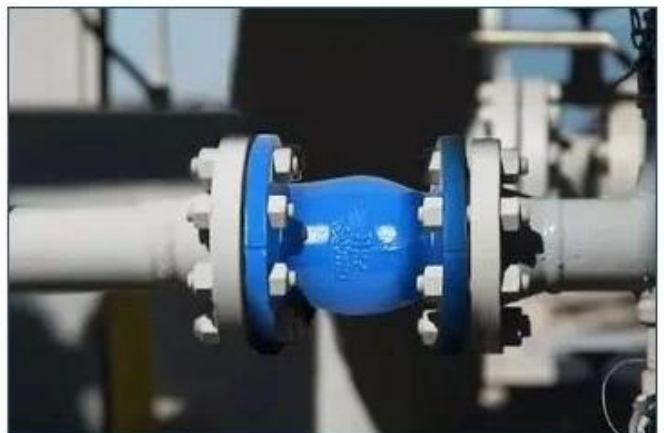

COMPANY INFORMATION



I 公司位于中国山东省临沂市兰山区

II 公司拥有 CNC 加工中心 100 余台，可承接各种精密机械加工业务

III 公司拥有完善的质量管理体系，通过了 ISO 9001 认证

IV 公司拥有专业的技术团队，具备丰富的行业经验

V 公司拥有 GB/T 19001-2016/ISO 9001:2015、ADWO-2000、TS 16949、PED、WRC WRAS、KTW、API 6D、API 609 等认证

VI 公司拥有完善的生产设备，可承接各种大型工业设备的制造和维修业务

COMPANY FACTORY



01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners





A: RKSfluid 27 70