## DESIGN FEATURES



#### **DURABLE:**

- · 1 piece non-welded PFA molded DSS Disc stem
- · Precision casting WCB/CF8M Bodies

#### TRIPLE SEAL:


- Triple Seal:Spring loaded Mechanical seal,Radial Lip Seal,FPM
- China ONLY ONE Manufacturer 400Mpa Isostatic pressing PTFE seat, consistent density

#### ANTI-CORROSION:

- · Material: Epoxy powder
- Coating Thickness:200-250μm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

## **QUALITY STANDARD**

- · 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- · ONLY ONE Manufacturer get CE certification up to DN1800
- · 2 years warranty.15000 times On off test,30000 times Destructive experiment

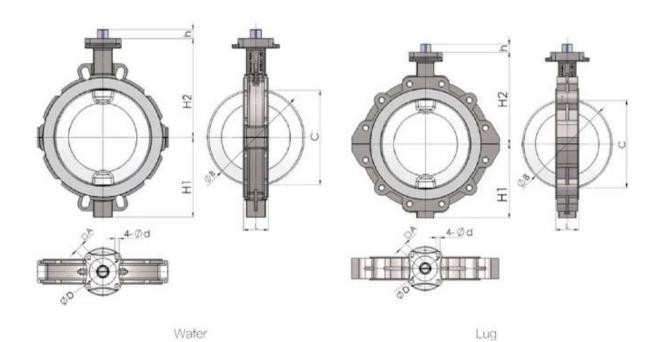

IMPERIAL DIMENSIONS:Inches										
Size	L	H1	H2	h	Α	В	С	D	d	IS05211
NPS2	1.69	2.20	5.31	0.47	0.43	2.01	1.08	1.97	0.28	F05
NPS2 1/2	1.81	3,35	5.91	0.47	0.43	2.72	1.99	1.97	0.28	F05
NPS3	1.81	3.74	6,30	0.63	0.55	3.27	2.70	2.76	0.35	F07
NPS4	2.05	4.13	7.09	0.63	0.55	4.06	3.50	2.76	0.35	F07
NPS5	2.20	4.92	7.68	0.63	0.55	5.00	4.49	2.76	0.35	F07
NPS6	2.20	5,71	10.04	0.63	0.55	5.98	5.57	2.76	0.35	F07
NPS8	2.36	6,69	9.45	0.83	0.75	7,99	7.64	4.02	0.47	F10
NPS10	2.68	8.07	11.81	0.94	0.87	10.00	9.65	4.92	0.51	F12
NPS12	3.07	9.84	12.20	1.14	1.06	12.01	11.61	4.92	0.51	F12

# **APPLICATION SCENARIO**



application







desalination



Water treatment



Water supply and drainage



HAVC





Food and drug Water transport

























## 

divanced Advanced CNC

relaved\_\_\_\_\_\_

us\_\_\_\_\_

 $inude \verb|||||||GB||||||||||TUV CE||ISO 9001||ADWO-2000||TS||PED||WRC WRA||KTW||API 6D||API609||$ 























## **COMPANY EXHIBITION**



















## 

 $\mathbf{Q}$ 

 $\mathbf{Q}$ 

 $\mathbf{Q}$ 

 $\mathbf{Q}$ 

 $A_{0}$ 

## Q∏Moq

## $\mathbf{Q}$

 $TUV \square API \square WRA \square CE \square ISO \square \square \square \square \square \square \square \square$ 

□□din□asme□bs en□jis□api□awwa□□□□□□□□

##