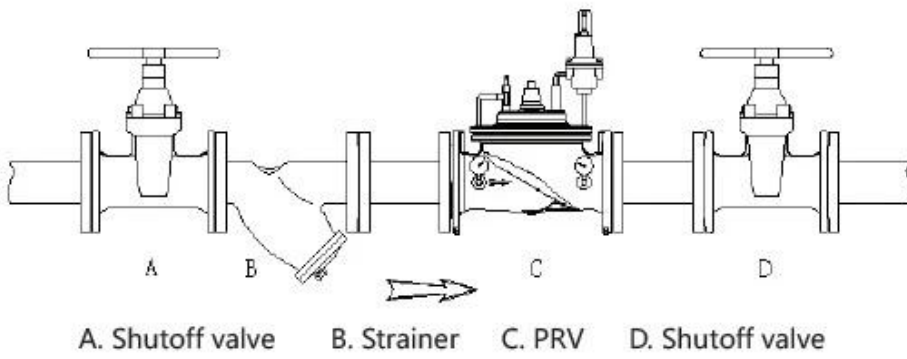


WRAS/KTW/NSF/FDA/ACS



1. 产品名称
 2. 产品规格
 3. 产品用途
 4. 产品材质
 5. 产品重量
 6. 产品尺寸
 7. 产品安装
 8. 产品维护
 9. 产品寿命
 10. 产品保修

规格	DN40-DN1200
材质	铸钢
温度	0℃~70℃
压力	1.0MPa/1.6MPa/2.5MPa/4.0MPa/6.3MPa/10.0MPa

dn	l	h	H1	dn	l	h	H1
40	230	139	85	250	730	476	205
50	230	139	85	300	850	526	232
65	290	159	95	350	980	585	262
80	310	179	102	400	1100	624	292
100	350	214	112	500	1250	720	360
125	400	278	127	600	1450	835	424
150	480	333	145	800	1850	1110	515
200	600	407	172	1000	2250	1350	630



COMPANY INFORMATION



i

divanced Advanced CNC Machining Center Professional Process Cells

china

cention

v GB American Standard Tuv CE ISO 9001 ADWO-2000 TS PED WRC WRA KTW API 6D API609

VI / /

COMPANY FACTORY



01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION








Partners





Q

Q

A Hrdraulic RKSfluid USA

Q 请问贵司有现货吗

A RK fluid 4 有现货

Q 请问贵司有现货吗

A 贵司有现货 25 有现货

Q Moq

A 贵司有现货 1PC

Q 请问贵司有现货吗

A 贵司有现货 100 有现货 2 有现货

TUV API WRA CE ISO 有现货

Standard DIN ASME BS EN JIS API AWWA 有现货

Q 请问贵司有现货吗

A RK fluid 20 有现货 70 有现货 R D 有现货