


[illegible]

2. 24

管径	DN200/DN1800
管端形式	PN10 PN16 PN25 PN40
管壁厚度	按标准
使用温度	80℃
执行标准	EN 593 符合 EN1074-1/2
管端连接	EN558 13 14
其他说明	符合EN558 13 14

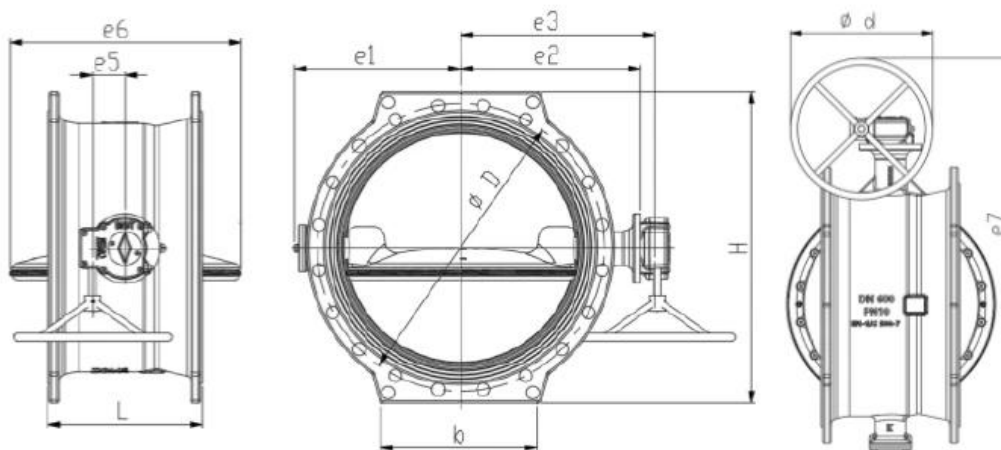

RKSfluid[®]
www.rksfluid.com

RKSfluid (Yingkou) Flow Control Company



SGS CE WRAS



RKSfluid[®]
www.rksfluid.com

RKSfluid (Yingkou) Flow Control Company



SGS **CE** **WRAS**

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY INFORMATION



I 公司基本情况

II 公司 CNC 加工能力

III 公司质量管理体系

IV 公司主要生产设备

V 公司符合 GB、ISO 9001、ADWO-2000、TS、PED、WRC WRAS、KTW、API 6D、API609

VI 公司主要客户



Q:

