


□□□□□□□□□□□□□□□□□□□□□□□□

□□□

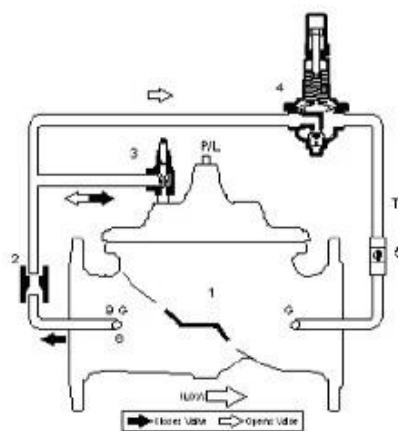

□□

□□□

1. □□□□□

2. □□□

3. □□□□□□

4. □□□□□□

5. □□□□□

6. □□□□□


□□□□□

1. □□□□□

2. □□□

3. □□□□□□□□□

4. □□□□□□□

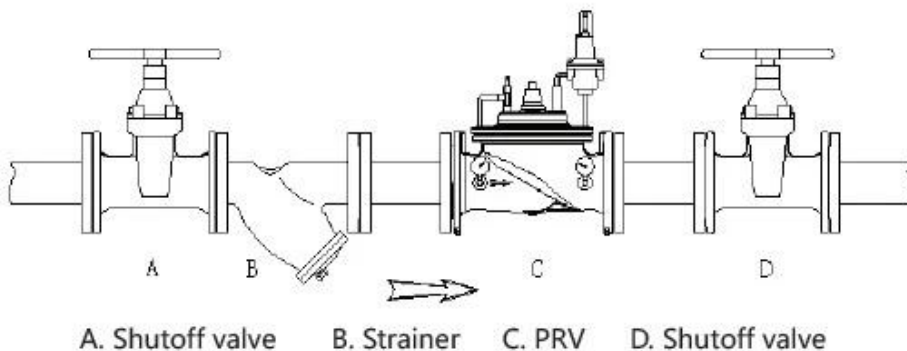

FB

DN	L	H2	W	
40	230	139	173	3/8
50	230	139	173	3/8
65	290	159	198	3/8
80	310	179	226	3/8
100	350	214	265	1/2
125	400	278	307	1/2
150	480	333	351	1/2
200	600	600	436	3/4
250	700	730	524	1
300	850	850	606	1

FB:

1. DN2mm
- 2.
- 3.
4. 10064
5. (FB) (RB) (ACD)
- 6.
- 6.1 : 1.1 * PN 1 Bar
- 6.2 : 1.5 * PN 1 Bar
- 6.3 : 0.2 Bar
7. 1000 Hz
- 8.
- 9.



COMPANY INFORMATION



- I
- II CNC
- III
- IV

V GB TUV CE ISO 9001 ADWO-2000 TS PED WRC WRAS KTW API 6D API609

VI

COMPANY FACTORY



01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Q: [RKSfluid 4](#) ?

A: [RKSfluid 4](#)

Q: ?

A: [25](#)

MOQ

A: 1

Q: ?

A: 100% 2 ?

TUV API WRAS CE ISO

DIN ASME BS EN JIS API AWWA

Q: ?

A: [RKSfluid 20](#) [70](#)