
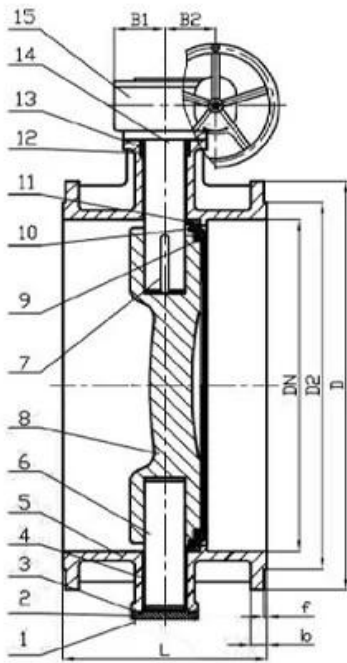


DESIGN FEATURES

This series of butterfly valves are used for industrial pipelines, as bi-directional open and close and regulation devices, the adjustment range is from 40°C-90°C full open.Suitable temperature≥ 80°C

Features

- Size range DN100-1200mm
- Standard-ISO/BS/DIN/AWWA/API
- Tests Standard-BS EN 12266-1
- Body-Ductile Iron/Cast Iron/Stainless Steel /WCB
- Body Ring-SS420/SS304/SS316
- Disc Ring-EPDM
- Shaft-SS420/SS431/SS316
- Fusion bonded epoxy coating-Min 300 Microns

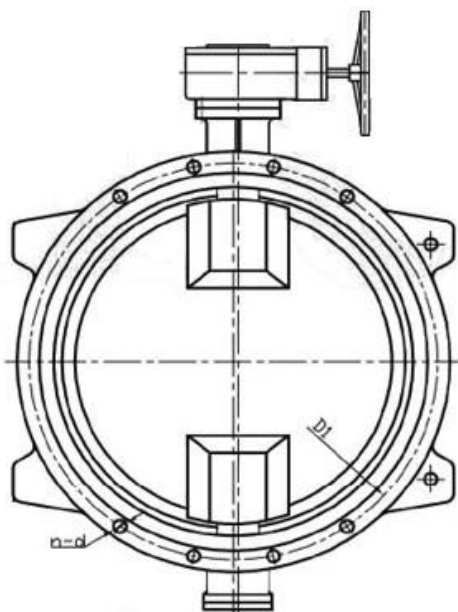

DN	DN200-DN4000
PN	PN10 PN16 PN25
Material	SS304 / SS316
Seal	EPDM
Standard	BS EN1092-2:1997 PN16
Notes	

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



I 公司位于中国山东省临沂市兰山区

II 公司拥有 CNC 加工中心 100 余台，可承接各种精密机械加工业务

III 公司拥有完善的质量管理体系，通过了 ISO 9001 认证

IV 公司拥有专业的技术团队，可提供技术咨询和售后服务

V 公司拥有 GB/T 19001-2016/ISO 9001:2015、ADWO-2000、TS 16949、PED、WRC WRAS、KTW、API 6D、API 609 等认证

VI 公司拥有完善的安全管理体系，可承接各种工业设备安装工程

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners





A: RKSfluid 20 70