


1. 该阀门适用于各种工业管道系统，如化工、石油、冶金、电力、制药、食品、水处理等。
 2. 该阀门具有结构简单、操作方便、密封可靠、使用寿命长等特点。
 3. 该阀门的密封材料采用EPDM/NBR橡胶，具有优异的耐腐蚀性能，适用于各种腐蚀性介质。
 4. 该阀门的球体采用自调心设计，能够有效防止介质对球体的冲刷和磨损，延长使用寿命。
 5. 该阀门的阀杆采用自清洁设计，能够有效防止介质在阀杆处积聚，保证阀门的正常运行。
 6. 该阀门的流阻系数小，能够有效降低管道系统的能耗。
 7. 该阀门的噪音低，能够有效降低管道系统的噪音污染。
 8. 该阀门的背压损失小，能够有效降低管道系统的压力损失。
 9. 该阀门的适用温度范围为0℃~80℃，适用于各种常温工况。
 10. 该阀门的适用压力范围为PN10/PN16/PN25，适用于各种中低压工况。
 11. 该阀门的适用口径范围为DN50~DN600，适用于各种大口径管道系统。
 12. 该阀门符合EN 558-1、ISO 5752、EN 1092-2、ISO 7005-2等国际标准。




- Streamlined,minimum noise
- Backflow velocity only 0. 2s, Head loss 0. 1bar with 2m/s
- EPDM/NBR Rubber fully coated disc
- Anti-erosion design. Self-adjusting ball
- Self-cleaning stem, Long time smooth operation


口径	DN50 -DN600 NPS2 -NPS24
公称压力	PN10/16/25
使用温度	0 °C~80℃
材质	铸钢/铸铜/不锈钢
密封材料	橡胶
执行标准	GB/T 12235-2007
法兰标准	EN 558-1
法兰连接	EN 1092-2

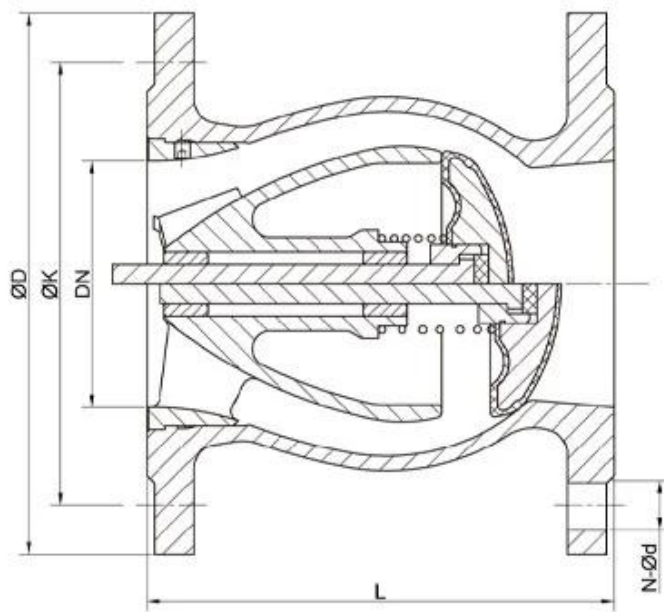

NPS2-NPS14 (DN50-DN350)

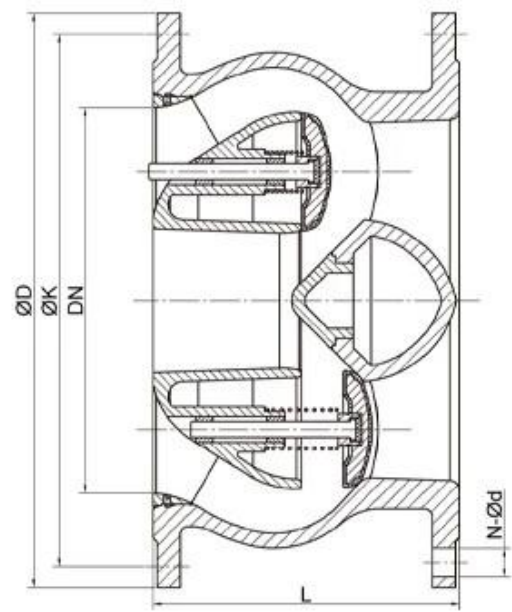

NPS16-NPS24 (DN400-DN600)

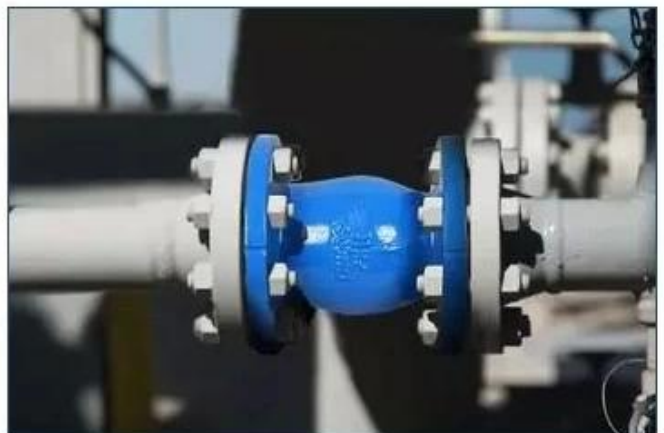

COMPANY INFORMATION



Advanced CNC Machining Center

Advanced CNC Machining Center Professional Process Cells

China

cention

GB American Standard Tuv CE ISO 9001 ADWO-2000 TS PED WRC
WRA KTW API 6D API609

VI / /

COMPANY FACTORY



01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06

COMPANY QUALIFICATION




COMPANY EXHIBITION



Partners





A

A Hrdraulic RKSfluid USA

A RKSfluid 4

[illegible]

A□□□□□□□1PC□

Standard DIN ASME BS EN JIS API AWWA

A RKSfluid 2770 RD