

Features



Air Release valve

Size range:DN25-DN300

Pressure ratings:PN10 PN16

Body:Ductile Iron


Trim:SS304 SS316 etc

Connection: ARVS/KARS-BPT threaded, KARX-Flanged


Working temperature: $-10^{\circ}\text{C}\sim+80^{\circ}\text{C}$

111

1. Advanced
2. Aerokinetic
3. Bottom
float.Smooth
4. No
5. Comply

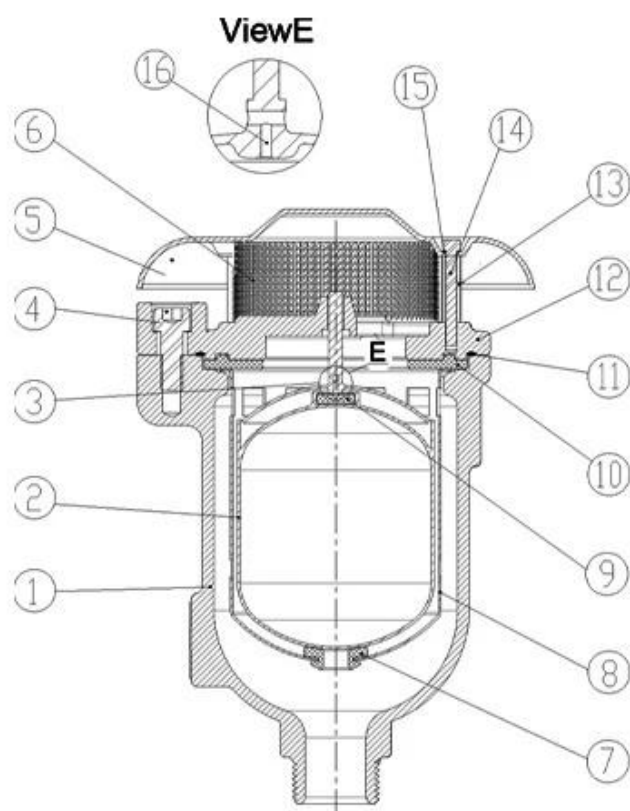

DN25-DN50

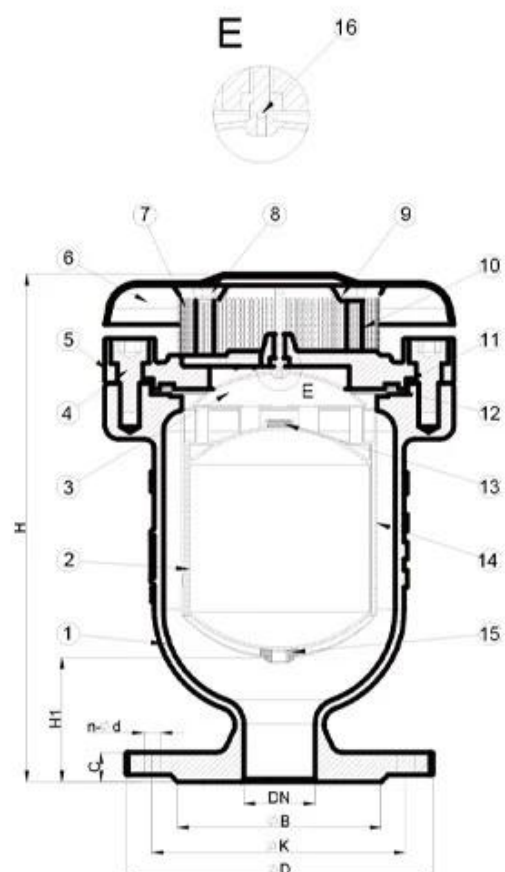

DN50-DN300





RKSfluid 1997

CNC GB

RKS GB ISO CE ADWO- 2000 TUV ISO9001 TS API Saddles.After

CNC

- ✓
- ✓
- ✓ GB TUV CE ISO 9001 ADWO-2000 TS PED WRC WRAS KTW API 6D API609

VI

Our Certificates



Exhibition Photos

