

1. 产品概述
 2. 产品特点
 3. 技术参数
 4. 应用范围
 5. 安装与使用
 6. 维护与保养
 7. 售后服务
 8. 公司简介
 9. 联系我们
 10. 产品目录


Diffuser
 1. 产品特点
 2. 技术参数
 3. 应用范围
 4. 安装与使用
 5. 维护与保养
 6. 售后服务
 7. 公司简介
 8. 联系我们
 9. 产品目录

EN 558-1 ISO 5752 EN 1092-2 ISO 7005-2




- Streamlined, minimum noise
- Backflow velocity only 0. 2s, Head loss 0. 1bar with 2m/s
- EPDM/NBR Rubber fully coated disc
- Anti-erosion design. Self-adjusting ball
- Self-cleaning stem, Long time smooth operation


规格	DN50 -DN600 NPS2 -NPS24
压力等级	PN10/16/25
温度范围	0 °C 80°C
材质	铸钢/不锈钢
密封材料	橡胶
执行标准	GB/T 12235-2007
法兰标准	EN 558-1
法兰标准	EN 1092-2

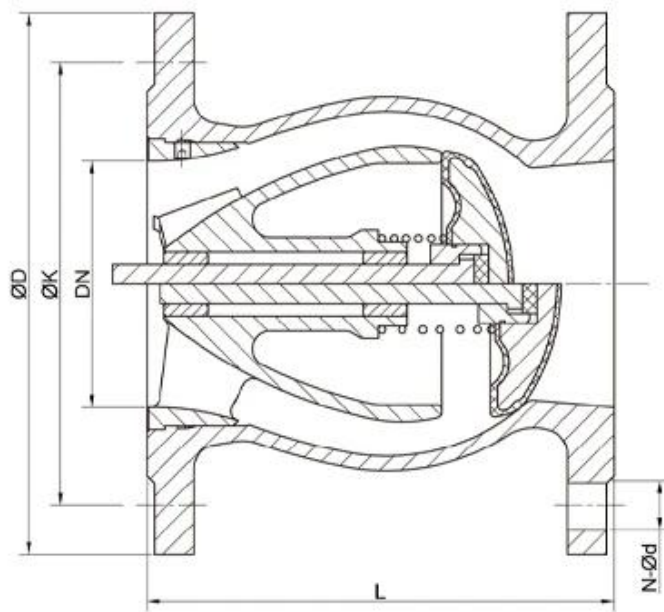

NPS2-NPS14 (DN50-DN350)

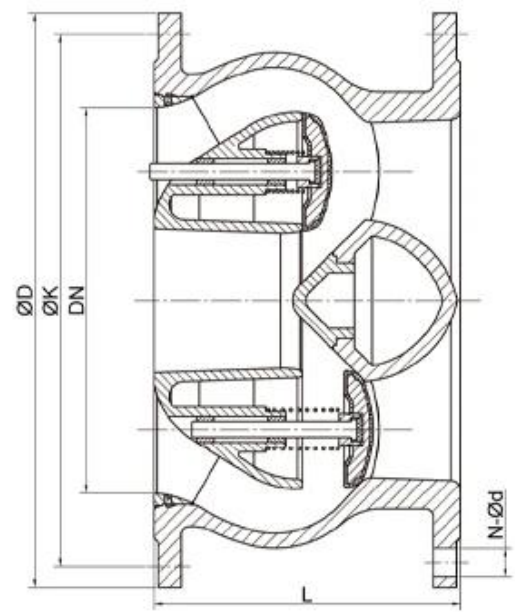

NPS16-NPS24 (DN400-DN600)

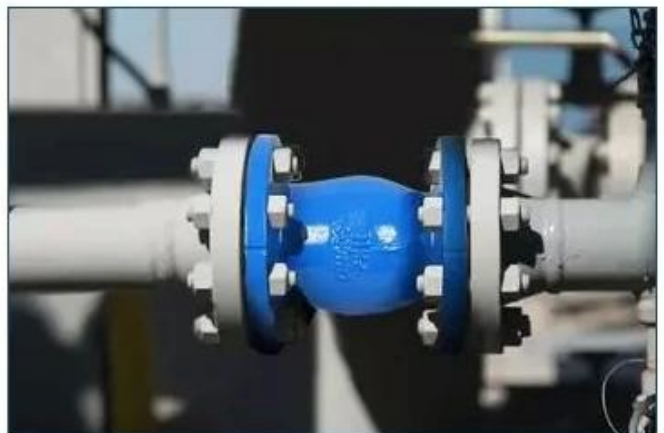

COMPANY INFORMATION



Advanced CNC Machining Center

Advanced CNC Machining Center Professional Process Cells

China

cention

GB American Standard Tuv CE ISO 9001 ADWO-2000 TS PED WRC
WRA KTW API 6D API609

VI / /

COMPANY FACTORY



01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06

COMPANY QUALIFICATION




COMPANY EXHIBITION



Partners





Q

A

Q RKSfluid 4

QMoq
A1PC

Q RKSfluid [27] RD