

DESIGN FEATURES

DURABLE




- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%

ANTI-CORROSION






- Material: Epoxy powder:  , Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment

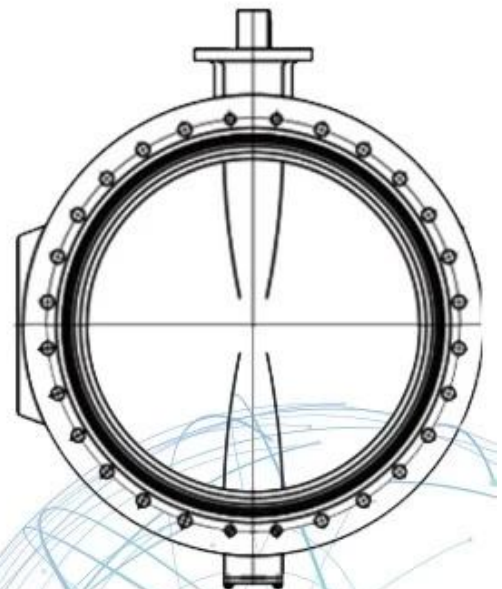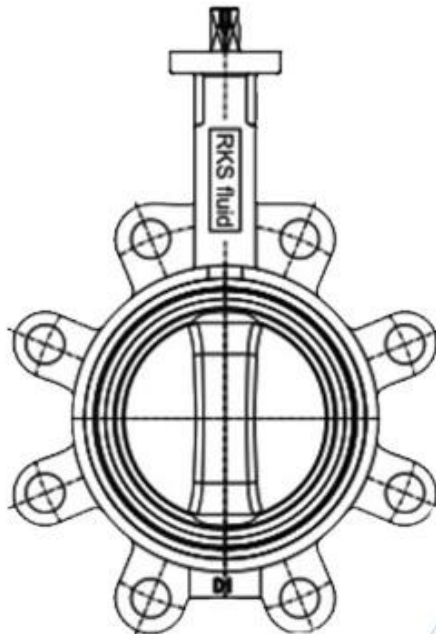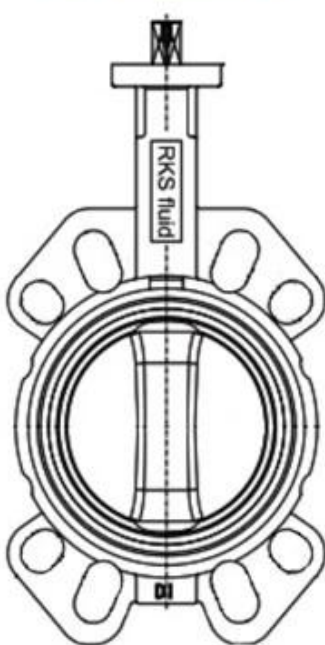

□□□	DN32 -DN2400 □NPS11/4 -NPS96□
□□□□	PN6 -PN10 -PN16□□□150□
□□□□	-10°C-80°C
□□	□□□□□□□□□□
□□□□□□□□	NBR□EPDM□Nature Rubber□Silicon□Viton

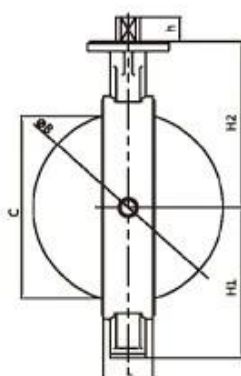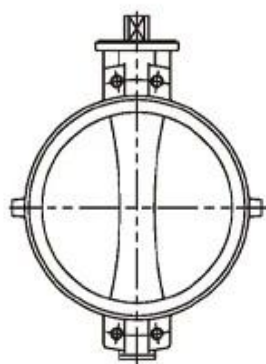

WAFER



LUG

NPS14-NPS40 Wafer/Lug with alignment holes

Size	L	H1	H2	h	A	ΦB	C	ΦG	a	b	ΦD	n-Φd	ISO5211
NPS14	3.07	10.63	11.81	1.42	1.06	Φ13.31	12.95	-	-	-	Φ4.92	4-Φ0.55	F12
NPS16	4.02	11.81	13.58	1.69	1.26	Φ15.35	14.80	-	-	-	Φ5.50	4-Φ0.71	F14
NPS18	4.49	12.99	14.76	1.93	4.42	Φ17.20	16.61	-	-	-	Φ5.50	4-Φ0.71	F14
NPS20	5.00	15.16	16.73	2.56	-	Φ19.09	18.43	Φ2.36	0.71	2.52	Φ6.50	4-Φ0.87	F16
NPS24	6.06	17.24	19.49	2.76	-	Φ23.03	22.24	Φ2.36	0.71	2.52	Φ6.50	4-Φ0.87	F16
NPS28	6.50	20.39	22.44	3.15	-	Φ26.77	25.98	Φ2.76	0.79	2.93	Φ10.00	8-Φ0.71	F25
NPS30	6.50	21.46	24.02	3.15	-	Φ28.74	27.95	Φ2.76	0.79	2.93	Φ10.00	8-Φ0.71	F25
NPS32	7.48	22.32	25.20	3.15	-	Φ30.43	29.49	Φ2.76	0.79	2.93	Φ10.00	8-Φ0.71	F25
NPS36	7.99	25.59	27.56	3.94	-	Φ34.49	33.54	Φ3.15	0.87	3.35	Φ10.00	8-Φ0.71	F25
NPS40	8.50	28.15	29.53	3.94	-	Φ38.43	37.48	Φ3.15	0.87	3.35	Φ11.73	8-Φ0.87	F30

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



A diagram of a horizontal beam of length L . A triangular load is applied to the left half of the beam, starting from 0 at the left end and increasing linearly to a peak value of w_0 at the midpoint. The right half of the beam is free of load. A reaction force R is shown at the right end of the beam, pointing upwards.



i

divanced Advanced CNC Machining Center Professional Process Cells

[illegible]

cention□□□□□□□□□□□□□□□□□□□□□□□□□□

vGBAmerican StandardTuv CEISO 9001ADWO-2000TSPEDWRC
WRAKTWAPI 6DAPI609

Vincent van Gogh, *Portrait of Dr. Gachet*, 1890, oil on paper, 18.5 x 26.5 cm, The Louvre Museum, Paris.



01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Delivery



Payment



□□□□□□

Q□□□□□□□□□□□□□□□□□□

A□□□□□□□□□□□□□□□□□□□□

Q□□□□□□□□□□□□□□

A□□□□□□□Hrdraulic□□□□□□□□□ RKSfluid □□□□□□□□USA□□□□□□□□□□□□□□□□□□□□□□□□

Q□□□□□□□□□□□□□□

A□ RKSfluid □□□□□□□□□□4□□□□□□□□□□

Q 请问贵司有

A 有 25 年专业生产经验，产品广泛应用于石油、化工、电力、冶金、船舶、机械等行业。

Q **Moq**

A 1PC

Q 请问贵司有

A 有 100 多种规格，2 种材质，可定制。

TUV API WRA CE ISO 9001 认证。

Standard DIN ASME BS EN JIS API AWWA 等。

Q 请问贵司有

A RKSfluid 27 70 R D 等产品，可定制。