RKSfluid®
A key Valve in Flow Control
Butterfly Valve
Ball Valve
Gate Valve
Globe Valve
Check Valve
Pipe Fittings

DESIGN FEATURES

HIGHLY CUSTOMIZABLE

- According to **customer requirements**

OPTIMAL SEALING

- AWWA-C219 **absolutely leakproof**
- Internal ebonite rubber lining

CLASSIC & STURDY DESIGN

- Longitudinal adjustment of **+/- 25mm**
- **Super large** Dia & Even pressures up to **100 bar**
- **Cost-effective**, alternative for duplex stainless steel on desalination application

APPLICATION

- Perfect solution for all standard and non-standard applications in challenging famous projects worldwide
- Desalination, water pipes and **various application**

DURABLE

- ANTI-CORROSION
- Thickness： **Epoxy powder** coating of **150-200μm**
- Temperature ： Spraying temperature over **200 ℃**. Doesn't fade, even wipe with **diethyl ether**

MATERIAL

- Epoxy powder: AkzoNobel , Earth Best!
- WRAS, KTW-W270, ACS approved materials
- Cast iron: nodularity over **95%**!
- Bolts, nuts & washers: Hot Dip Galvanized or Stainless Steel **AISI316-A4**

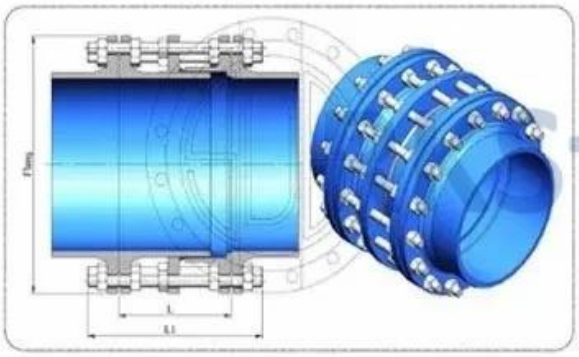

Application Scenario

Industrial water application | Hydroelectric generation | Sewagetreatment | Water treatment | Water supply and drainage | Water transport | Pipe network in house | Irrigation

Our Factory

Company Advantages

01 21 years of professional experience

02 4 factories

03 Independent research and development team
28 top senior professional researchers

04 2 professional testing centers

05 100% high level ex-factory inspection

06 High quality imported materials

07 2 years quality assurance, repair and replacement

Ⅰ□□□□□□□□□□□□□□□□□□□□□□□□□□

Ⅱ□□□CNC□□□

Ⅲ□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

Ⅳ□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

V□□□□□GB□□□□□□□□□□□□TUV CE□ISO 9001□ADWO-2000□TS□PED□WRC WRAS□KTW□API 6D□API609□

VI□□/□□□/□□□□□□□□□□□□□□□□□

□□□□□□

Q□□□□□□□□□□□□□□□□□□□□□□□□□□
A□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

Q□□□□□□□□□□□□□□□□□□□□□□□□□
A□□□□□□□□□□□□□□□□□□□ RKSfluid□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

Q□□□□□□□□□□□□□□□□□□□
A□RKSfluid□□□□□□□□□□□□□□4□□□□□□□□□□□□

Q□□□□□□□□□
A□□□□□□□2□5□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

Q□MOQ
A□□□□□□□□1□□

Q□□□□□□□□□□□□
A□□□□□100□□□□□□□2□□□□□□□□□□□□□□□□□□□□□□□□□□□□
TUV□API□WRAS□CE□ISO□□□□□□□□□□□
DIN□ASME□BS EN□JIS□API□AWWA□□□□□□□□

Q□□□□□□□□□□□□□□□□□□□□□□□□□□□
A□RKSfluid□20□□□□□□□□70□□□□□R&D□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□