

DESIGN FEATURES





● TECHNICAL REQUIREMENT

- 1.Design standard:BS 5163.
- 2.Face to face:BS 5163.
- 3.Flanges standard:BS EN1092-2:1997 PN16.
- 4.Test standard:BS EN12266-1 Rate B.

● FEATURES

- Double flange metal seated gate valve
- Size Range:DN50-DN2000
- Standard-ISO/BS/DIN/AWWA/API
- Tests Standard-BS EN 12266-1
- Body Ring-Bronze/SS420/SS304/SS316
- Body-Ductile Iron /Cast Iron/Stainless Steel /WCB
- Fusion bonded epoxy coating-min 300 microns

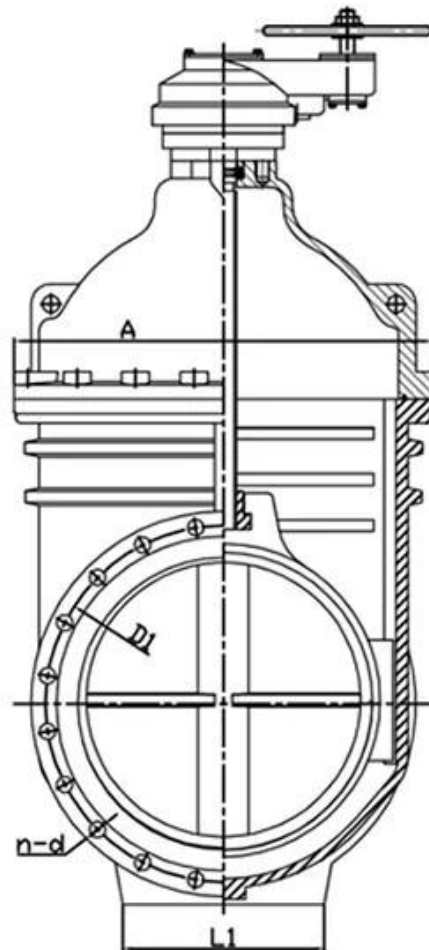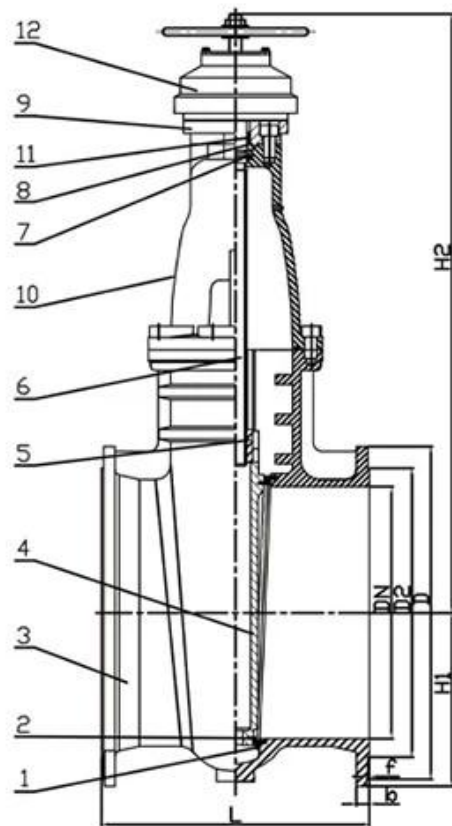

RELATED PRODUCTS



SMALL DIAMETER GATE VALVE
DN50-DN300,PN10/16/25



METAL SEATED GATE VALVE
DN350-DN600,PN10/16/25



**LARGE DIAMETER
METAL SEATED GATE VALVE**
DN700-DN2000,PN10/16/25

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY INFORMATION



business

conCNC

balvase

centration

umproduct GB TUV CE ISO 9001 ADWO-200 TS PED WRC
WRA KTW API 6D API609

/ /



01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners





□ □ □ □ □ □

Q

A

Q

```

#####
#####hrdraulic##### RKSfluid #####

```

Q

A RKSfluid 4

D

A 25

D-Moq

A 1PC

Q□□□□□□□□

A□□□□100□□□□□□□□□□□□□□□□□□□□□□□□□□□□2□□□□

TUV API WRA CE ISO

Standard ☐ DIN ☐ ASME ☐ BS EN ☐ JIS ☐ API ☐ AWWA ☐ ☐ ☐ ☐ ☐ ☐

Q

A RKSfluid 2070 RD