



## DESIGN FEATURES



This series of butterfly valves are used for industrial pipelines, as bi-directional open and close and regulation devices, the adjustment range is from 40°C-90°C full open. Suitable temperature  $\geq 80^{\circ}\text{C}$

### Features

- Size range DN100-1200mm
- Standard-ISO/BS/DIN/AWWA/API
- Tests Standard-BS EN 12266-1
- Body-Ductile Iron/Cast Iron/Stainless Steel /WCB
- Body Ring-SS420/SS304/SS316
- Disc Ring-EPDM
- Shaft-SS420/SS431/SS316
- Fusion bonded epoxy coating-Min 300 Microns

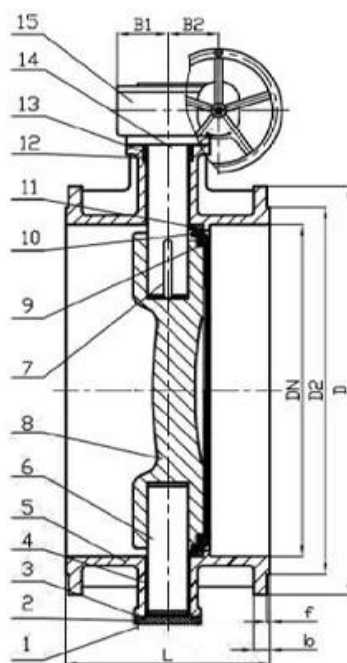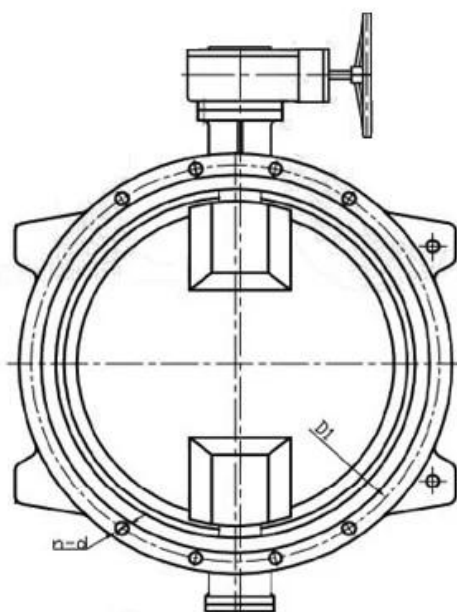

## APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport





## COMPANY FACTORY



## COMPANY INFORMATION



independently owned and operated

divanced Advanced CNC manufacturing capabilities

related to the production of

us manufacturing capabilities

include GB, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRA, KTW, API 6D, API609

VI, and other certifications. The company is a member of the American Society of Mechanical Engineers (ASME) and is a registered provider of ASME Section VIII, Division 1, and ASME Section IX welding services. The company is also a member of the American Welding Society (AWS) and is a registered provider of AWS Certified Welders (CWI) and AWS Certified Welding Inspectors (CWI).





## COMPANY QUALIFICATION





□ □ □ □ □ □ □

**Q**

A

**Q**

A000000hrdraulic00000000 RKSfluid000000USA0000000000000000000000000000

Q

A RKSfluid 4

**Q**□□□□□□□□

A 25

## QMoq

A□□□□□□□1PC□

Q□□□□□□□□□□

A 100 2

TUV API WRA CE ISO

□□din□asme□bs en□jis□api□awwa□□□□□□□□

**Q**

A\_RKSfluid\_20\_70\_R\_D